



## GENERAL CONSTRUCTION NOTES

- 1. THE PURPOSE OF THIS PLAN IS TO DEMONSTRATE PROPOSED WORK WITHIN THE 100' BUFFER TO WETLANDS AND WITHIN THE INNER AND OUTER RIPARIAN ZONE. SHOWN FEATURES' RELEVANCE TO THE PROPERTY LINE ARE NOT WARRANTED ON THIS PLAN.
- 2. TOPOGRAPHIC INFORMATION SHOWN ON THIS PLAN IS BASED UPON AN ACTUAL ON THE GROUND SURVEY PERFORMED BY MERRILL ASSOCIATES, INC. DURING MARCH 2009.
- 3. ALL ELEVATIONS ARE BASED ON NAVD 88.
- 4. WETLAND RESOURCE AREAS WERE DELINEATED BY JOHN MCGRATH OF J.F. MCGRATH AND ASSOCIATES ON
- 5. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH ALL APPLICABLE STATE AND LOCAL STANDARDS AND REGULATIONS.
- 6. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AND STRUCTURES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF VARIOUS UTILITY COMPANIES AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE LOCATION OF ALL UNDERGROUND UTILITIES AND STRUCTURES SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION. THE CONTRACTOR MUST CONTACT THE APPROPRIATE UTILITY COMPANY, ANY GOVERNING PERMITTING AUTHORITY, AND "DIG SAFE" AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION WORK TO REQUEST EXACT FIELD LOCATION OF UTILITIES INTERFERING WITH THE PROPOSED CONSTRUCTION AND APPROPRIATE REMEDIAL ACTION TAKEN BEFORE PROCEEDING WITH THE WORK. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE
- 7. EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO THE COMMENCEMENT OF ANY SITE WORK OR EARTHWORK OPERATIONS, SHALL BE MAINTAINED DURING CONSTRUCTION, AND SHALL REMAIN IN PLACE UNTIL ALL SITE WORK IS COMPLETE.
- 8. CULVERT/PIPE INLETS AND OUTFALLS SHALL BE PROTECTED BY HAY BALE FILTERS UNTIL DISTURBED AREAS ARE PERMANENTLY STABILIZED.
- 9. IF POSSIBLE, HAY BALES SHALL BE PLACED AROUND CATCH BASINS. THE CATCH BASINS SHALL ALSO BE FITTED WITH A SEDIMENT TRAP OF SILTATION FABRIC UNDER THE CATCH BASIN RIM. SILT LADEN RUNOFF SHALL BE PREVENTED FROM FLOWING ONTO OFF-SITE PROPERTIES. SILTATION FENCE SHALL BE INSTALLED IN ADVANCE OF CONSTRUCTION ALONG THE EDGE OF ALL DISTURBED AREAS AND SHALL BE MAINTAINED THROUGHOUT CONSTRUCTION.
- 10. THE CONTRACTOR SHALL KEEP ON SITE AT ALL TIMES ADDITIONAL HAY BALES AND EXTRA SILTATION FENCING FOR INSTALLATION AT THE DIRECTION OF THE CONSERVATION COMMISSION.

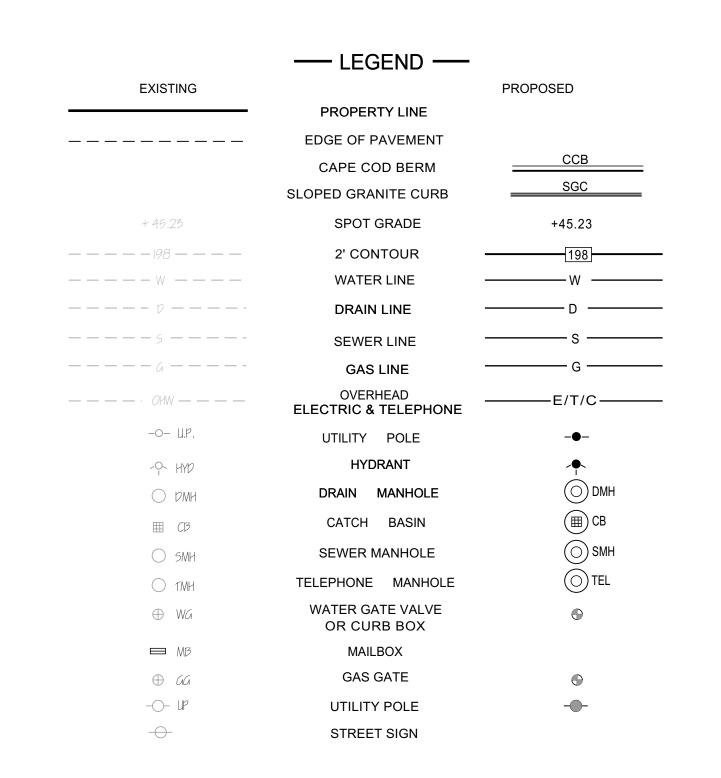

REVISIONS



DRAWN BY: JR

DESIGNED BY: JR

CHECKED BY: JMB



ASSOCIATES, INCEGISTERED PROFESSIONAL ENGINEE AND LAND SURVEYOR AND LAND SURVEYOR AND SURVEYOR A

RIVER AVENUE K, MASSACHUSETTS

SEEKONK, M
APPLICANT
BAY STATE GAS - JOH
995 BELMONT STREET

MARCH 30, 2009 SCALE: 1"=40'

JOB NO. 09-019

LATEST REVISION:

EXISTING CONDITIONS

SHEET 1 OF 1