




Menemsha Federal O&M Dredging *Project Discussion*

Agenda

- I. Introductions
- II. Federal Dredging Project Background
- III. Update on Modeling efforts undertaken by local sponsors
- IV. Dredging Project Schedule
- V. Interaction of dredging with other Federal projects (Section 206 / Jetty repair)
- VI. Discussion of dredge material placement options / associated costs if federal standard is not selected.



Federal Project Background

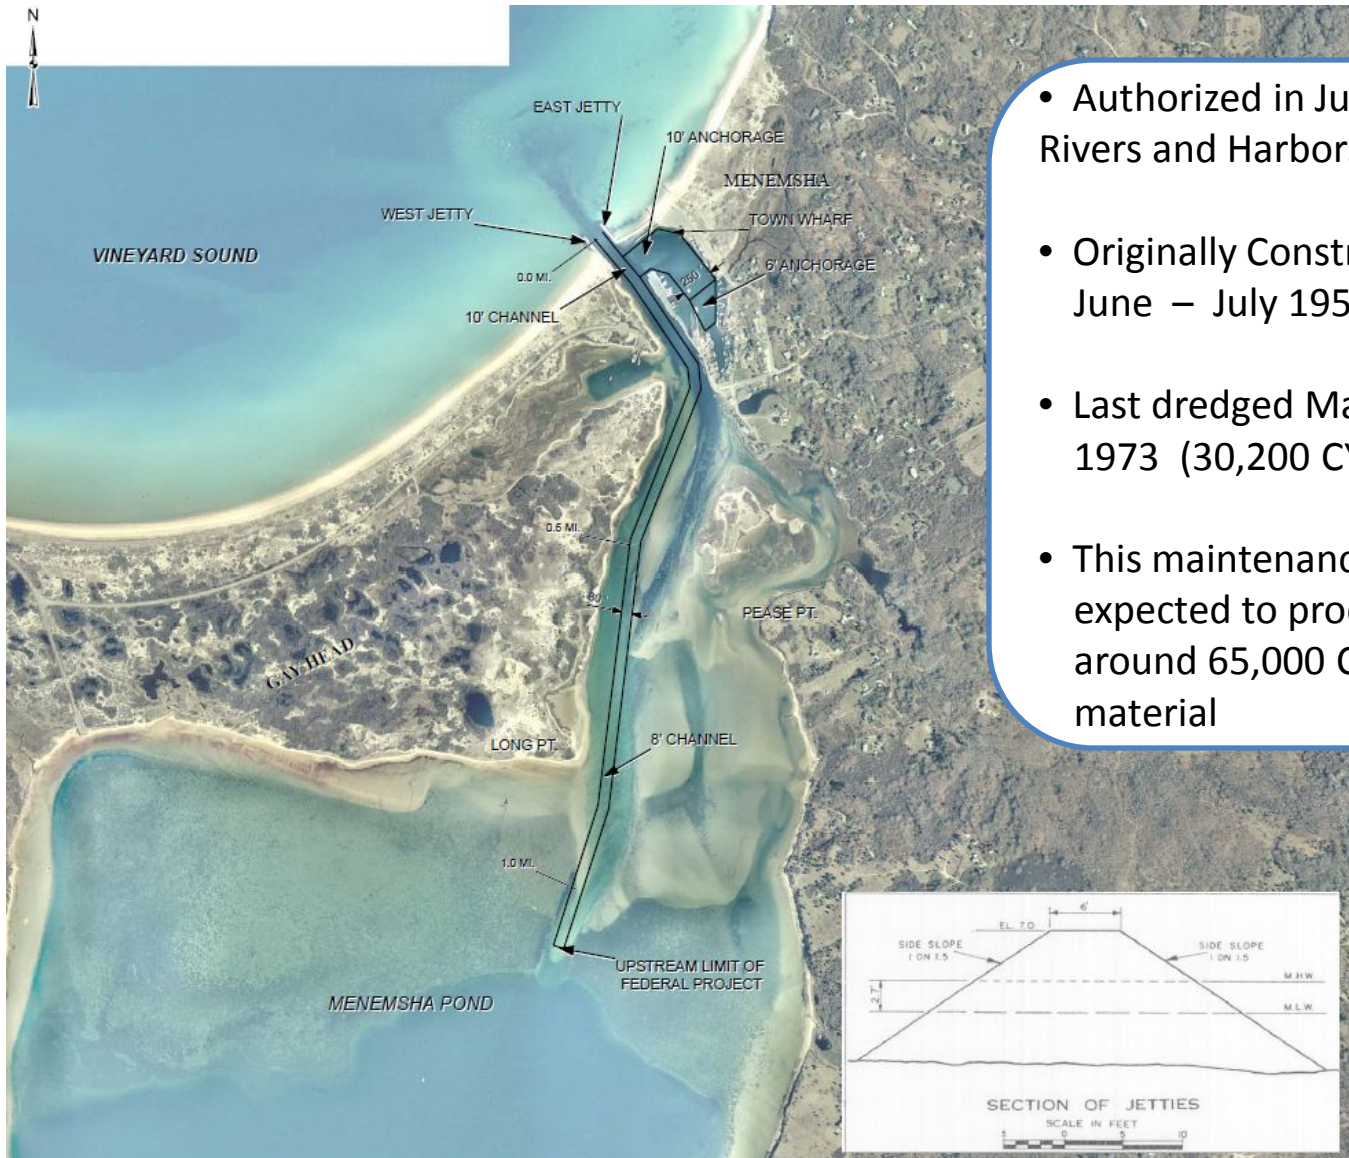

- Authorized in June 1945 – Rivers and Harbors Act
- Originally Constructed in June – July 1950
- Last dredged March – July 1973 (30,200 CY)
- This maintenance event is expected to produce around 65,000 CY sandy material



US Army Corps of Engineers
New England District

Update on Sponsor(s) Modeling Efforts

Answers needed by US Army Corps to progress with project:

- Date of expected model completion. (Prelim. and/or Final)
- Determination of extent of dredging into Menemsha Pond.
- Date of consensus reached by Tribe/Towns.
- Dredge material placement location.



US Army Corps of Engineers
New England District

Dredge Project Schedule

Schedule Item	Date(s)	Note
Environmental Coordination	Nov 2013 – Feb 2014	
Water Quality Cert / Coastal Zone Consistency Received	End of Apr 2014	State/Fed resource agency approval of plan
Plans and Specifications	Jan 2013 – Apr 2014	Including Rights of Entry*
Plover Management Plan / Monitoring Commitment Letter*	Jan 2013 – Feb 2014	Will be required prior to completion of Environmental Coordination
Contract Solicitation Process	May 2014 – Jun 2014	
Contract Award / Notice to Proceed	End of Jul 2014	
Dredging Activities	October 1, 2014 (?)– Jan 14, 2015	Must be completed by Jan 14 due to environmental requirements

* Denotes action on the part of the Sponsor(s)



US Army Corps of Engineers
New England District

Sponsor(s) Efforts on behalf of the Project

Rights of Entry


- Help the Government identify laydown / office trailer areas for the contractor to use.
- Town property or close to project preferential.
- Army Corps District Office will prepare Rights of Entry/Easement documents for a specific period of time.
- Needs Sponsor approval (if town/tribe property).

Piping Plover Management Plan

- Requirement by the US Fish & Wildlife Service and MA DEP.
- 5-yr monitoring plan which can be undertaken by Sponsor or its representative (but not the Government).
- Instituted even though no Plovers may have used the beach previously. (Drawn by dredge material placement.)
- US Army Corps will provide example used at another Federal dredge project site.



Dredge Material Placement Alternatives

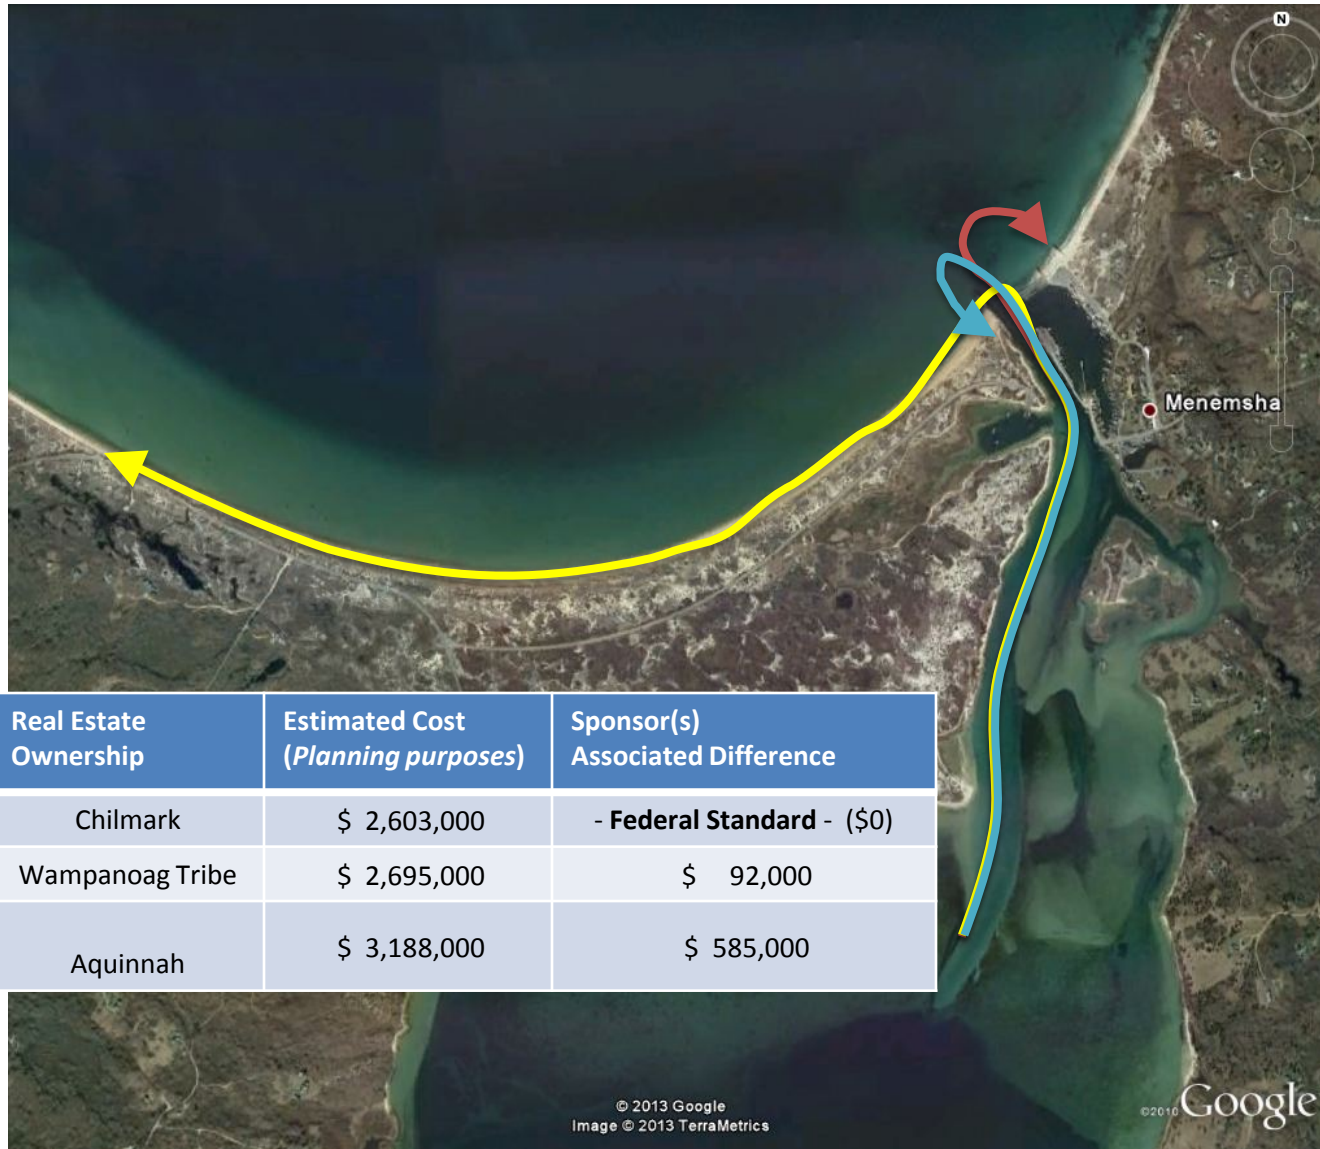

Placement Options

East Beach — 

Dune —

Lobsterville Rd —

 Federal Standard

Placement Location	Real Estate Ownership	Estimated Cost (Planning purposes)	Sponsor(s) Associated Difference
East Beach	Chilmark	\$ 2,603,000	- Federal Standard - (\$0)
Dune Restoration	Wampanoag Tribe	\$ 2,695,000	\$ 92,000
Lobsterville Rd – Coastal Protection	Aquinnah	\$ 3,188,000	\$ 585,000



US Army Corps of Engineers
New England District