INVITATION TO BID

Proposals are invited by the owners for rehabilitation work on the property specified below:

Project Address: 121 Northside Drive

Torrington CT 06790

Proposals will be received until 9:00 a.m. on Thursday, November 6, 2014 at which time they will be opened. Proposals will be delivered to:

City of Torrington
Purchasing Department Office
140 Main Street
Torrington CT 06790

Project Specifications are available at the Torrington, Purchasing Department Office, Mon. through Fri. 9:00 a.m. to 4:00 p.m. or at the State of Conn. Dept. of Admin. Services (DAS) website, **www.das.ct.gov**, State Contracting Portal, Town of Torrington, Solicitation Number 143-341.

For more information, contact Bob Caliolo at phone: 203-573-1188 x 211 or email: bob@lwagnerassociates.com.

A mandatory pre-bid conference will be held at the following location and time:

PRE-BID Thursday, October 30, 2014

8:30 a.m. 121 Northside Drive Torrington CT 06790

The above work includes: Roofing, windows, doors, siding, carpentry, electrical, heating, lead paint remediation.

AN AFFIRMATIVE ACTION / EQUAL OPPORTUNITY EMPLOYER
WBE / MBE / SBE AND SECTION 3 DESIGNATED CONTRACTORS
ARE ENCOURAGED TO APPLY

INSTRUCTIONS TO BIDDERS

Mail or deliver this entire completed bid package in a sealed envelope to be <u>received</u> no later than 9:00 a.m. on Thursday, November 6, 2014

TO: City of Torrington
Purchasing Department Office
140 Main Street
Torrington CT 06790

To be noted on outside of envelope:

DO NOT OPEN UNTIL 9:00 a.m. on Thursday, November 6, 2014

Project No. 143-341

121 Northside Drive Torrington CT 06790

THERE WILL BE A MANDATORY PRE-BID CONFERENCE AT THE ABOVE SITE AT: 8:30 a.m. on: Thursday, October 30, 2014

NOTE: CONTRACTOR IS TO SUBMIT THIS <u>ENTIRE</u> BID PACKAGE. ALL BIDS MUST BE FILLED OUT COMPLETELY. IT IS SUGGESTED THAT CONTRACTORS RETAIN A COPY OF THIS ENTIRE BID PACKAGE.

ALL BIDS SHALL REMAIN IN EFFECT FOR FORTY FIVE (45) CALENDAR DAYS AFTER THE RECEIPT OF BIDS.

CONTRACTOR'S BUSINESS NAME:	
	(PLEASE PRINT)

AN AFFIRMATIVE ACTION/EQUAL OPPORTUNITY EMPLOYER
WBE / MBE / SBE AND SECTION 3 DESIGNATED CONTRACTORS
ARE ENCOURAGED TO APPLY

CITY OF TORRINGTON SCOPE OF WORK, PART 1, GENERAL CONDITIONS

OWNER: Stanley Relva PROJECT: 143-341

ADDRESS: 121 Nothside Drive Torrington CT 06790

1. The Contractor, unless otherwise specified, shall provide all labor, materials, tools, equipment, and related items, and pay all necessary taxes, fees, and permits necessary to complete all of his work as detailed on the attached scope of work.

- 2. All rehabilitation, alterations, repairs, or extensions shall be in compliance with all applicable codes of the Municipality. All electrical, heating, and plumbing work shall comply with the rules and regulations of the National, State and Local Codes. Before commencing work, contractors and/or subcontractors shall obtain all necessary permits.
- 3. The Contractor certifies that he has familiarized himself with the requirements of the specifications and plans and understands the extent and character of the work to be done, and inspected the premises and given his full attention to any and all areas with which he might become specifically involved. He must familiarize himself with all conditions relating to and affecting his work and bid.
- 4. The selected Contractor must, prior to contract signing, supply the City of Torrington and the Owner with the original certificates of insurance for general liability, auto liability, and worker's compensation, as applicable. General liability insurance shall be a broad form contractual endorsement with minimum limits of one million (\$1,000,000.00) dollars per occurrence for bodily injury and five hundred thousand (\$500,000.00) dollars per occurrence for property damage. Auto Liability insurance shall cover hired and non-hired autos in accordance with State law. Workers' Compensation Insurance shall have a minimum limit of one hundred thousand (\$100,000.00) dollars for each accident. The Contractor shall indemnify and save harmless the Owner and the City of Torrington under these policies. The contractor shall name the City of Torrington, its agents and the Owner as additional insured as their interests may appear on the General Liability Insurance.
- 5. The Contractor agrees that all services offered by the Municipality through L. Wagner & Associates, Inc. (hereinafter referred to as the "Consultant"), which may affect the Contractor, are offered by the Municipality in order to assist in the project implementation and the necessary program compliance. The Contractor agrees to, upon review and acceptance of such services provided, indemnify, defend, save and hold harmless the Municipality and Consultant, their officers, agents and employees from and against any and all damage, liability, loss, expense, judgment or deficiency of any nature whatsoever (including, without limitation, reasonable attorney's fees and other costs and expenses incident to any suit, action or proceeding) incurred or sustained by Municipality or consultant which shall arise out of or result from consultant's performance in good faith of services pursuant to the Professional Services Contract. The Contractor agrees that the Consultant shall not be liable to the Contractor, its heirs, successors or assigns, for any act performed within the duties and scope of employment pursuant to Professional Services Contract.

- 6. All materials shall be new and of acceptable quality. The property Owner shall select all colors, models, etc. All materials and work must be applied in accordance with the applicable manufacturer's latest instructions and specifications, and in accordance with Federal prohibitions against the use of lead paint. All manufacturers' warranties are to be extended to the property Owner free and clear of all liens. Unless otherwise specified, all labor, material, and workmanship provided by the Contractor shall be guaranteed by the Contractor for a one (1) year period from the date of the Certificate of Completion. This guarantee shall be in addition to and not in limitation of, in lieu of, or modify any other guarantee that is due the property Owner from any manufacturer.
- 7. The Contractor shall repair or replace all work, materials, and equipment which are found to be defective during construction and the guarantee period. Repair shall include all damage to surrounding work caused by the failure and/or necessary for the repair or replacement of the defect. All repairs and replacements shall be performed at no additional expense to the Owner and shall be completed promptly after the Contractor receives notice of the defect.
- 8. The Contractor shall take all necessary measures and precautions to protect the surroundings from damage occurring due to performance of the work. If such damage occurs it will be repaired by the Contractor at no cost to the Owner.
- 9. The Contractor shall dispose of all debris and remove all material resulting from his work in accordance with local and State law. The Contractor shall police and maintain a clean and safe job site daily. He shall reinstall accessories taken down and clean up all scrap around the project and remove fingerprints. All on-site maintenance relating to the performance of the work shall be the responsibility of the Contractor until the Certificate of Completion is issued. The project shall be maintained in a habitable and safe condition daily if the project is to remain occupied.
- 10. All work shall be neat and accurate and done in a manner in accordance with customary trade practices.
- 11. The Contractor shall not make <u>any</u> changes to the scope of work unless a change order is processed and fully executed by the property Owner and the Program.
- 12. The Owner may cancel this contract by (to be determined) and not be liable to the Contractor or the Municipality. Should the Owner opt to cancel they must sign and send the attached cancellation notice, see Attachment A, to the Contractor, otherwise the Owner shall issue a Notice to proceed authorizing the contractor to commence with the proposed improvements. Should the Notice to Proceed not be issued prior to 10 consecutive calendar days from the date of the expiration date of the right to cancel then the Contract will become Null and void.
- 13. The Contractor shall commence work under this contract prior to (to be determined) and complete the work by (to be determined).

- 14. If the Contractor is delayed at any time in the progress of the work by any act or neglect of the Owner or by any employee of the Owner, or by any separate Contractor employed by the Owner, or by changes ordered in the work or by labor disputes, fire, unusual delay in delivery of materials, transportation, adverse weather conditions not reasonably anticipatable, unavoidable casualties, or any causes beyond the Contractor's control, or by delay authorized by the Owner pending arbitration, or by any other cause which justifies the delay, the contract time shall be extended by Change Order for such reasonable time as may be agreed upon by all parties. It shall be the responsibility of the Contractor to request and document in writing such extensions within three (3) calendar days. In the event that the Contractor does not commence or pursue the work as hereinafter stated, then the Owner shall have the right to terminate this agreement and to hire a successor Contractor to perform the work. Any such termination shall be by certified mail to the address noted in this agreement, and shall be effective as of the date of mailing. Payments by the Owner in the event of termination shall be as follows:
- 15. The successor Contractor shall first be paid and then the terminated Contractor. Payments to the terminated Contractor shall be limited both as to those funds remaining after payment to the successor Contractor but shall not exceed the value of the work actually performed by the terminated Contractor. Further, should the total cost for work performed under this contract exceed the amount stated in this agreement due to the Contractors termination, then the Owner shall have a cause of action against the terminated Contractor for any such additional cost.
- 16. If, through any cause, the Contractor shall fail to fulfill in a timely and proper manner his obligations under this Contract, or if the Contractor shall violate any of the covenants, agreements, or stipulations of this Contract, the Owner shall, thereupon, have the right to terminate this Contract by giving written notice to the Contractor of such termination and specifying the effective date of such termination. In such event, all unfinished work required by the Contractor under this Contract shall, at the option of the Owner, be completed or not.
- 17. The Contractor may request a maximum of (to be determined) progress payments as work is completed in accordance with the attached specifications. The request shall be in the form of an itemized bill for that portion of work completed by the Contractor. All requests for payment shall be accompanied by a fully executed Lien Waiver, on a form provided by the Program. Final payment is contingent upon the receipt of a signature of the respective inspector for which each permit was issued. The Contractor shall be responsible for obtaining the signatures and presenting them upon final payment.
- 18. All claims or disputes between the Owner and Contractor arising out of or related to the work shall be resolved in accordance with Construction industry arbitration rules of the American Arbitration Association (AAA), unless the parties mutually agree otherwise. The Owner and Contractor shall submit all disputes or claims, regardless of the extent of the work's progress, to AAA. Notice of the demand for arbitration shall be filed in writing, with a copy to the other party to this Construction Agreement, and shall be made within a reasonable time after the dispute has arisen. The award rendered by the arbitrator shall be final, and judgment may be entered upon it in accordance with applicable law in any court having jurisdiction thereof. IF the arbitrator's award is in a sum which is less than that which was offered in settlement by the Owner, the arbitrator may award costs and attorney's fees in favor of the Owner.

If the award of the arbitrator is in a sum greater than that which was offered in settlement by the Contractor, the arbitrator may award costs and attorney's fees in favor of the Contractor.

It is understood and agreed by the parties hereto that neither party will institute any form of legal action, including, but not limited to, attaching the assets of the other party, unless and until it has made a good faith attempt to have the dispute resolved in accordance with the provisions of this Section. Noncompliance with the conditions precedent constitutes a waiver of the right to assert said claim.

- 19. Section 3 of the Housing and Urban Development Act of 1968 applies to this contract if the amount of HUD assistance exceeds \$200,000 or the contract or subcontract exceeds \$100,000. The Contractor shall, to the maximum extent feasible, provide opportunities for training and employment in connection with this contract to low income persons residing in the PMSA relevant to the project t location. The Contractor must make a good faith effort to fill any job vacancies and training opportunities with low income persons residing in the PMSA relevant to the project location. Where the preceding applies, contractors must comply with the following Section 3 Clause:
 - A. The work to be performed under this contract is subject to the requirements of Section 3 of the Housing and Urban Development Act of 1968, as amended, 12 U.S.C. 1791u (Section 3). The purpose of Section 3 is to ensure that employment and other economic opportunities generated by HUD assistance or HUD-assisted projects covered by Section 3, shall, to the greatest extent feasible, be directed to low- and very low-income persons, particularly persons who are recipients of HUD assistance for housing.
 - B. The parties to this contract agree to comply with HUD's regulations in 24 CFR part 135, which implement Section 3. As evidenced by their execution of this contract, the parties to this contract certify that they are under no contractual or other impediment that would prevent them from complying with the part 135 regulations.
 - C. The Contractor agrees to send to each labor organization or representative of workers with which the Contractor has a collective bargaining agreement or other understanding, if any, a notice advising the labor organization or workers representative of the Contractor's commitments under this Section 3 clause, and will post copies of the notice in conspicuous places at the work site where both employees and applicants for training and employment positions can see the notice. The notice shall describe the Section 3 preference shall set for the minimum number and job titles subject to hire, availability of apprenticeship and training positions, the qualifications for each; and the name and location of the person(s) taking application for each of the positions; and the anticipated date the work shall begin.

- D. The Contractor agrees to include this Section 3 clause in every subcontract subject to compliance with regulations in 24 CFR part 135, and agrees to take appropriate action, as provided in an applicable provision of the subcontract or in this Section 3 clause, upon a finding that the subcontractor is in violation of the regulations in 24 CFR part 135. The Contractor will not subcontract with any subcontractor where the Contractor has notice or knowledge that the subcontractor has been found in violation of the regulations in 24 CFR part 135.
- E. The Contractor will certify that any vacant employment positions, including training positions, that are filled (1) after the Contractor is selected but before the contract is executed, and (2) with persons other than those to whom the regulations of 24 CFR part 135 require employment opportunities to be directed, were not filled to circumvent the Contractors obligations under 24 CFR part 135.
- F. Noncompliance with HUD's regulations in 24 CFR part 135 may result in sanctions, termination of this contract for default, and debarment or suspension from future HUD assisted contracts.
- 20. The Contractor will not discriminate against any employee or applicant for employment because of race, color, creed, religion, sex, sexual preference, national origin, or mental or physical disability during the performance of this agreement. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment, in all employment practices such as the following: employment, upgrading, demotion or transfer, recruitment, advertising, layoff or termination, rates of pay or other forms of compensation and selection for training, including apprenticeship, without regard to their race, color, creed, religion, sex, sexual preference, national origin or mental or physical disability. This provision will be inserted in all subcontracts for work covered by this agreement.
- 21. In the event of the Contractor's noncompliance with this equal opportunity clause or with any of the said rules, regulations, or orders, this contract may be canceled, terminated, or suspended in whole or in part and the Contractor may be declared ineligible for further contracts in accordance with procedures authorized in Presidential Executive Order 11246, or by rule, regulations, or order of the Secretary of Labor or as provided by law.
- 22. The following applies to all contracts of \$10,000.00 or more: SECTION 402 VETERANS OF THE VIETNAM ERA. AFFIRMATIVE ACTION FOR DISABLED VETERANS AND VETERANS OF THE VIETNAM ERA. The Contractor will not discriminate against any employee or applicant for employment because he or she is a disabled veteran of the Vietnam era in regard to any position for which the employee or applicant for employment is qualified. The Contractor agrees to take affirmative action to employ, advance in employment and otherwise treat qualified disabled veterans and veterans of the Vietnam era without discrimination based upon their disability or veteran status in all employment practices such as the following: employment upgrading, demotion or transfer, recruitment, advertising, layoff or termination, rates of pay or other forms of compensation and selection for training, including apprenticeship.

- 23. The premises herein shall be occupied during the course of the construction work.
- 24. No officer, employee or member of the Governing Body of the City of Torrington shall have any financial interest, direct or indirect, in this contract or the proceeds of this loan.
- 25. The Owner and/or City Torrington retains the right to reject any or all bids or any part of any bid in part or in whole if deemed to be in the best interest of the Owner and/or City Torrington.
- 26. Substitutions of materials from that specified are only allowed on an approved/equal basis. The Contractor must submit written documentation of the substitute item or material for approval by the Owner and Program prior to making such substitution. Any items or material substituted by the Contractor without prior written approval of the Owner and Program will at Contractor's expense be replaced if it is determined not to be equal to the item or material specified. Any surrounding, adjoining, or dependent items affected by replacement of unequal substituted material shall also be replaced, reworked, and reinstalled at no cost to the Owner.
- 27. Bids shall contain prices for general categories of work and/or items as specified on the attached sheets. In the event of a discrepancy between prices listed in the specifications and those on the cost summary sheet, the prices listed on the specification for that section shall prevail. In the case of a mathematical error by the Contractor, the correct sum of the individual line items in the specifications (not in the cost summary) shall be the Contractor's bid.
- 28. All bids shall remain in effect for thirty (30) calendar days.
- 29. The Owner will supply all necessary power required by the Contractor at no additional cost to complete his work. Power shall be limited to the use of existing outlets and shall not exceed the existing capacity of the system. Power required over the capacity of the existing electrical system shall be the responsibility of the Contractor. Heating during construction shall be supplied by the owner.

30. OTHER PROVISIONS - LEAD BASED PAINT

A. Any and all rehabilitation work under this Agreement will comply with the requirements of the Federal Lead-Based Paint Poisoning Prevention Act (42 U.S.C. 4831) which prohibits the use of lead-based paint in residential structures constructed or rehabilitated with Federal Assistance in any form.

The construction or rehabilitation of residential structures with assistance provided under this contract is subject to the final regulations "Requirements for Notification, Evaluation and Reduction of Lead-Based Paint Hazards in Federally owned Residential Property and Housing Receiving Federal Assistance". The regulation is at 24 CFR Part 35. It implements sections 1012 and 1013 of the Residential Lead-Based Paint Hazard Reduction Act of 1992, Title X, of the Housing and Community Development Act of 1992. Sections 1012 and 1013 amend the Lead-Based Paint Poisoning Prevention Act of 1971.

Provided, however, that the Owner shall have sole responsibility for assuring that his property conforms to the Lead-Based Paint Removal Requirements and the Program shall not assume any liability whatsoever as a result of identifying volatile levels of Lead-Based Paint or its removal except insofar as to comply with applicable environmental regulations.

PUBLIC LAW 91-695 "LEAD-BASED PAINT POISONING PREVENTION ACT" The Contractor shall adhere strictly to the provisions of the "Lead-Based Paint Poisoning Prevention Act". Specifically, the Contractor will not utilize lead-based paint as a finish or undercoat or any other use in or out of residential dwellings funded in whole and/or part by the Federal Government.

31. The specifications and drawings, if any, are complimentary. Work described in the specifications does not necessarily have to appear on the drawings, nor does work described on the drawings necessarily have to appear in the specifications. The Contractor is responsible for estimating all work whether described in the specifications, the drawings, or both. If there is a discrepancy between the drawings and the specifications, the specifications shall prevail. All work, whether described in the specifications, or the drawings is to be included in the bid summary sheet by appropriate line item. The contract will only be awarded to general Contractors bidding on ALL line items.

ATTACHMENT A

Notice of Cancellation

To be determined

I hereby cancel this transaction.

You may cancel this transaction without any penalty or obligation, within three business days from the above date.

If you cancel, any property traded in, any payments made by you under the contract or sale, and any negotiable instrument executed by you will be returned within ten business days following receipt by the seller of your cancellation notice, and any security interest out of the transaction will be canceled.

If you cancel, you must make available to the seller at your residence, in substantially as good condition as when received, any goods delivered to you under this contract or sale; or you may, if you wish, comply with the instructions of the seller regarding the return shipment of the goods at the seller's expense and risk. If you do make the goods available to the seller and the seller does not pick them up within twenty days of the date of the cancellation, you may retain or dispose of the goods without any further

obligation. If you fail to make the goods available to the seller, or if you agree to return the goods to the seller and fail to do so, then you remain liable for performance of all obligations under the contract.

To cancel this transaction, mail or deliver a signed and dated copy of this cancellation notice or any other written notice, or send a telegram to (Contractor Name) at (Contractor Address), (Contractor City, State, Zip), not later than midnight of (Contract Cancel Date).

Signed	Date	

LEAD PAINT INFORMATION AND LEAD REPORT

Lead Hazards

- 1. The contractor will address all lead hazards listed in the enclosed lead report.
- 2. If the total cost of the project exceeds \$25,000 the contractor carrying out the work must comply with the licensing requirements established pursuant to Connecticut General Statute sections 20-474 through 20-476, and the Lead Licensure and Certification Regulations sections 20-478-1 through 20-478-2. The contractor carrying out the work must be licensed by the Connecticut Department of Public Health as a Licensed Lead Abatement Contractor. Employees carrying out the work must be certified as Lead Abatement Workers. At least one employee onsite must hold certification as a Lead Abatement Supervisor.
- 3. If the location of the rehabilitation project is the residence of a child under the age of six, then the contractor carrying out the work must comply with the licensing and certification requirements described in paragraph A, above. The contractor must also carry out lead abatement work, as described under the Lead Poisoning Prevention and Control Regulations section 19a-111-1 through 19a-111-11. A contractor shall not begin work until after the lead abatement work plan has been approved by the local Director of Health.
- 4. If the total cost of the project is under \$25,000 the contractor carrying out the work must comply with the requirements of the U.S. Environmental Protection Agency's (EPA) Renovation, Repair and Painting Rule (RRP Rule), as well as with HUD's Lead-Safe Work Practices requirements. The company or firm hired to carry out the work shall hold the credential of "EPA RRP Certified Firm." An individual representing that firm, must hold the credential of "EPA certified Renovator." Workers onsite must be trained in lead-safe work practices. (Please note: Although the HUD Lead-Safe Work Practices requirements do not apply to projects that are below \$5,000, the EPA RRP Rule does apply to projects that cost less than \$5,000. Also, the EPA and HUD lead-safe work practices 'certifications' are not equivalent to the licensure and certification requirements of the Connecticut Department of Public Health.)

Disposal

- 1. The Contractor shall perform a Toxicity Characteristic Leaching Procedure test, TCLP, as pursuant to Regulations of Connecticut State Agencies Section 22a-449(c)-101(a) (1), incorporating 40 CFR 262.24.
- 2. The TCLP test will determine the toxicity of the material being disposed of and classify it as either bulky waste or hazardous waste.
- 3. The Contractor shall assume in their bid price that the TCLP test will result in the disposal of the material as bulky waste. In the event that the TCLP test determines the material to be disposed of as hazardous waste a change order will be negotiated prior to the disposal.
- 4. The Contractor shall provide the Owner, Town and Consultant with copies of the TCLP test results.

Clearance Testing

- 1. The Contractor shall hire a Licensed Lead Abatement Consultant, who employs a Certified Lead Inspector or Certified Lead Inspector Risk Assessor to carry out a re-inspection of the work area where lead hazards have been controlled or eliminated. The re-inspection and clearance sampling shall be done only after completion of the project. If visible debris remains in the work area, the project is not complete. The licensed lead consultant and certified inspector shall issue a letter of compliance when the lead remediation or lead abatement work, and dust wipe results are found to be acceptable.
- 2. The Contractor shall provider the owner, and town with copies of the dust wipe clearance results and the letter of compliance.

October 20, 2014

Stanley Relva 121 Northside Drive Torrington, CT 06790

Dear Mr. Relva,

Thank you for choosing me to do the lead paint test of your house at 121 Northside Drive, Torrington, CT In addition to this report, I am enclosing the following information:

- 1. Summary Report showing information on readings at or above the action level of 1.0 mg/cm². This report shows <u>only</u> the leaded surfaces.
- 2. Detailed Report showing results of <u>all</u> readings. Both reports identify:
 - The readings, organized by room.
 - Wall: this shows the side of the house where the reading was taken. Note that the wall closest to the street is always the "A" wall the remaining walls are named in clockwise fashion, with B to the left side, C on the Rear side, and D on the right side. For example, if the inspection refers to a door on the "A side" of a room, it would be located on the wall of the room that is closest to the street.
 - Structure: This identifies the component that was tested for example a window or door.
 - Location: This indicates if the reading was on the left, right or center side of the wall.
 - Member: This identifies what part of the components was tested. For example, the window sill or the stair tread.
 - Paint Condition: The condition of the paint (I for intact, and P for poor or defective) Note that "Poor" simply means that there are visible defects in the surface.
 - Lead (mg/cm²): This shows the amount of lead measured in milligrams per square centimeter. Note that anything at or greater than 1.0 mg/cm² is considered a toxic level of lead.
 - Mode: All readings were taken in "QuickMode", which means the XRF automatically tests as long as necessary to provide a 95% confidence level.
- 3. Rough drawing of the house. (The drawings are intended only to show room layout; they are not to scale)
- 4. Dust wipe results.

Scope of Work

A risk assessment was done using XRF readings on selected painted and stained surfaces on the interior and exterior of the house. Ground cover was good: No soil samples were taken. Dust wipes were taken on a representative floor and a sill; all wipes were below toxic limits.

Results

The following is a summary of all surfaces that contain lead. Lead hazards need to be addressed; intact surfaces that are not currently hazards do not need to be addressed. Note that the assessment reflects the condition on the day of the walkthrough – if additional painted surfaces become defective, they will have to be stabilized and repainted.

Exterior

	Lead Hazards	Intact leaded Surfaces
Exterior	Shingle siding	
	Fascia, soffits	
	Window trim	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
	Front Entry Overhang	
Breezeway	Door, casing/ext.jamb/stop to	The control of the co
	Bsmt	re-
Garage	Overhead door	Overbead door ext. jamb
	C side door/jamb	
West Constitution of the C	Window sash/aluminum trim	

Interior

Lead Hazards	Intact leaded Surfaces
None	None

Actions:

Exterior:

- 1. Discard the existing wood, shingle siding and replace it with vinyl siding per L. Wagner specs. Wrap/enclose the fascia, soffits, and window trim.
- 2. Make the necessary repairs to the Front Entry overhang. Fully enclose the ceiling in vinyl soffit panels and wrap all the trim/supports.

Garage

- 3. Replace the leaded, wood window on the Garage with a vinyl replacement window per L. Wagner specs. Discard the exisiting aluminum wrap on that window and re-wrap the window. (note: the existing aluminum wrap may be painted as an alternate to replacing the wrap.)
- 4. Replace the overhead Garage door with a new non-insulated garage door per L. Wagner specs. Wrap any exposed trim/ext. jamb.
- 5. Replace the C-side Garage door with a new, pre-hung, garage door per. L. Wagner specs. Wrap any exposed trim.

Breezeway

6. Replace the door to the Basement with a pre-hung, exterior door per L. Wagner Specs. Wrap any exposed trim/ext. jamb

Scope of Work: Non-Hazardous/Code Correction

See the L. Wagner spec for all other non-lead work.

1. Prime and then paint any new surfaces, repaired surfaces, or stripped surfaces to match the surrounding color scheme.

Relocation

The resident are required to re-locate while window replacement is done because of the presumption of lead beneath the existing vinyl replacement windows. They may reoccupy the home after clearance has been achieved.

Staging of the work

The specific dates for the work will be established after the project has gone out to bid and a lead-safe contractor has been selected.

Clearance

The contractor is responsible for hiring an independent lead inspector/risk assessor to perform clearance. Clearance wipes must be taken on separate floors, sills (or wells) in all rooms in which lead work was done, per the Connecticut standards and must meet the dust wipe standards established by HUD. The lead inspector/risk assessor must issue a letter of compliance at the end of the project and send it to the owner, contractor, health department and L. Wagner and Associates.

Note: Although the vinyl replacement windows currently in-place are not leaded, the underlying substrates are assumed to be leaded. Additionally, the exterior trim is leaded and poses a contamination hazard. Dust wipes must be taken from a Floor/sill or Floor/well on all four sides of the home after installation of the new vinyl replacement windows as a part of the Clearance.

Management Plan

The owner will be responsible for monitoring surfaces with lead based paint to ensure surfaces do not become defective. All renovation and maintenance work must be done using lead safe work practices.

The owner must also include in their monitoring any lead based paint surfaces that are enclosed to ensure that the enclosure has not become defective and exposed the lead based painted surfaces. Monitoring will be done formally on a quarterly basis.

Note that the lead test was done based on testing the materials on the surface. The XRF penetrates only about 3/8"; therefore there may be additional leaded surfaces below the existing walls or trim that were not accessible for testing. Any additional painted surfaces that are uncovered in the future should be assumed to be leaded (or tested for lead) and lead safe work practices should be used.

The owner will ensure that anyone who is called in to do maintenance (i.e. plumbers, electricians, and so on) on any enclosed leaded surface will be notified that they are working on a leaded surface. This notification will be in writing.

ХŪ		

	Remaining Lead
Exterior	Front Entry Overhang
an ann ann ann an Aireann ann an Aireann an Aireann an Aireann an Aireann ann ann an Aireann ann aireann an Ai	Fascia, soffits
	Window trim
Breezeway	Casing/ext. jamb to Bsmt
Garage	Body of Garage/ (assumed)
	Ext. jamb to Overhead door
	Window trim

Interior

Ľ	
ſ	
ŀ	Remaining Lead
E.	
ľ	7.7
Ŀ	i None
Ĕ.	11,0110

Disclosure

The Federal Residential Lead-Based Paint Hazard Reduction Act, 42 U.S.C. 4852d, requires sellers and landlords of most residential housing built before 1978 to disclose all available records and reports concerning lead-based paint and/or lead-based hazards, including the test results contained in this notice, to purchasers and tenants at the time of sale or lease or upon lease renewal. This disclosure must occur even if hazard reduction or abatement has been completed. Failure to disclose these test results is a violation of the U.S. Department of Housing and Urban Development and the U.S. Environmental Protection Agency regulations at 24 CFR Part 35 and 40 CFR Part 745 and can result in a fine of up to \$11,000 per violation. To find out more information about your obligations under federal lead-based paint requirements, call 1-800-424-LEAD. Landlords (lessors) and sellers are also required to distribute an educational pamphlet and include standard warning language in their leases or sales contracts to ensure that parents have the information they need to protect their children from lead-based paint hazards.

Again, I appreciate the opportunity to work with you.

J. Cil

Sincerely,

Bob Kennedy

Lead Inspector # 002240 Planner/Designer #002158


Cc; Bob Caliolo

L. Wagner & Associates

121 Northside Drive, Torrington

For layout only; not to scale

Side C

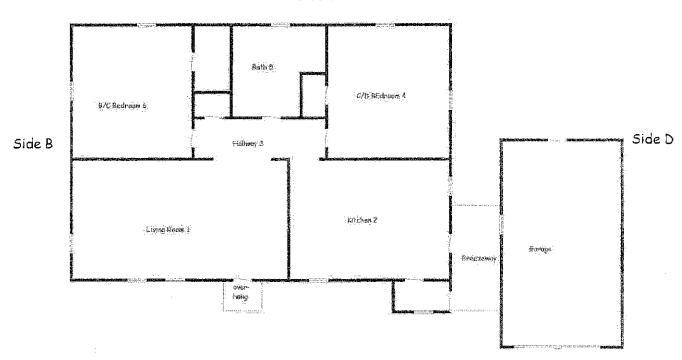

Side A

LEAD PAINT INSPECTION REPORT

REPORT NUMBER:

S#01109 - 10/08/14 13:43

INSPECTION FOR:

Stanley Relva 121 Northside Dr. Torrington, CT 06790

PERFORMED AT:

121 Northside Drive

Torrington, CT 06790

INSPECTION DATE:

10/08/14

INSTRUMENT TYPE:

RMD

MODEL LPA-1

XRF TYPE ANALYZER Serial Number: 01109

Date:

ACTION LEVEL:

1.0 mg/cm²

OPERATOR LICENSE:

002240

SIGNED:

SafeHomes Inc. Bob Kennedy PO Box 1125

Waterbury, CT 06721-1125

Inspection Date:

10/08/14

121 Northside Drive

Report Date: Abatement Level:

10/17/2014

Torrington, CT 06790

1.0

Report No.

S#01109 - 10/08/14 13:43

Total Readings:

139

10/08/14 13:43

Job Started: Job Finished:

10/08/14 15:15

MI -	g W-W	Otal and an annual			Paint			Lead	
No.	Wall	Structure	Location	Member	Cond	Substrate	Color	(mg/cm²)	Mode
Exte	rior R	oom 001 Exterio	or						
085	A	Wall	L Rgt		P	AsbShingle	е	0.7	QМ
086	A	Wall	L Rgt		P	AsbShingle	e	1.0	QM
089	A	Foundation	Rgt		P	ConcrBloc		0.2	QM
090	A	Foundation	Rgt		P	ConcrBlock	k	0.3	QM
088	A	Fascia			P			0.3	QM
087	A	Soffit			P			0.3	QM
093	A	Soffit			P			-0.3	QM
091	A	Window	Rgt	Lft casing	P			1.0	QM
094	A	Door	Ctr	Lft casing	I			-0.3	QM
092	A	DrOverhang	Ctr	_	P			3.7	QM
095	В	Wall	L Rgt		P	AsbShingle	3	0.1	QM
96	В	Wall	L Rgt		Þ	AsbShingle		1.0	QM
103	B	Foundation	L£t		I	ConcrBlock		-0.4	QM
102	В	Window	Lft	Sill	P	,		0.1	QM
097	В	CelWinSill	Rgt		P	Concrete		0.1	QM
098	В	CelWinFrame	Rgt		P	Metal		0.1	QM
099	В	Chimney	Rgt		P	Brick		-0.3	QM
100	B	Chimney	Rgt		P	Brick		-0.1	QM
101	В	Chimney	Rgt		P	Brick		-0.1	QM
106	С	Wall	L Lft		P	AsbShingle	<u> </u>	0.6	QM
107	C	Foundation	Lft		P	ConcrBlock		-0.2	QM
104		Window	Lft	Sill	P			2.6	QM
105	С	CelWinSill	Lft	_		Concrete			-
	C D	CelWinSill Wall		_	P P	Concrete AsbShingle	è	0.4	QM
105 108 109	D D	Wall Wall	Lft L Rgt L Rgt		P	Concrete AsbShingle AsbShingle		0.4 0.0	ØM ØM
108 109	D D	Wall	Lft L Rgt L Rgt		P P	AsbShingle		0.4	QM
108 109 Comme	D D ent: Ho	Wall Wall Duse has vinyl	Lft L Rgt L Rgt replaceme		P P	AsbShingle		0.4 0.0	QM MQ
108 109 Comme	D D ent: Ho	Wall Wall puse has vinyl com 002 Breezew	Lft L Rgt L Rgt replaceme		P P P	AsbShingle AsbShingle		0.4 0.0 1.0	QM MQ
108 109 Comme Exter 110	D D ent: Ho	Wall Wall buse has vinyl com 002 Breezew Floor	Lft L Rgt L Rgt replaceme ay Ctr		P P P	AsbShingle		0.4 0.0 1.0	MQ MQ MQ MQ
108 109 Comme Exter 110	D Dent: Ho	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam	Lft L Rgt L Rgt replaceme ay Ctr Ctr	nt windows.	P P P	AsbShingle AsbShingle		0.4 0.0 1.0	ОW ОМ
108 109 Comme Exter 110 121	D D ent: Ho A A B	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft	nt windows.	P P P I P	AsbShingle AsbShingle		0.4 0.0 1.0	MQ MQ MQ MQ
108 109 Comme Exter 110 121 118	D D ent: Ho A B B	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Door	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft	nt windows. Lft casing U Ctr	P P I P P	AsbShingle AsbShingle Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2	ÖW ÖW ÖW ÖW ÖM
108 109 Comme Exter 110 121 118 115	D Dent: Ho Lor Ro A B B B	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Door Stairs	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft	nt windows. Lft casing U Ctr Treads	P P P P P	AsbShingle AsbShingle Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1	M M M M M M M M M M M M M M
108 109 Comme Exter 110 121 118 115 113	D D ent: Ho A A B B B B	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Door Stairs Stairs	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft	nt windows. Lft casing U Ctr	P P P P P	AsbShingle AsbShingle Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0	OW OW OW OW OW OW
108 109 Comme Exter 110 121 118 115 113	D D D ENT: Ho LOT Ro A B B B B B	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Door Stairs Stairs ExteriorJamb	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft	nt windows. Lft casing U Ctr Treads	P P P P P P	AsbShingle AsbShingle Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0	ÖW ÖW ÖW ÖW ÖM ÖM
108 109 Comme Exter 110 121 118 115 113 114 116	D D D nt: Ho ior Ro A A B B B B B B	Wall Wall Douse has vinyl Doom 002 Breezew Floor CeilingBeam Door Door Stairs Stairs ExteriorJamb Door Stop	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft	nt windows. Lft casing U Ctr Treads	P P P P P P P	AsbShingle AsbShingle Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0	OW OW OW OW OW OW OW OW
108 109 Comme Exter 110 121 118 115 113 114 116 117	D D D nt: Ho ior Ro A A B B B B B B B	Wall Wall Douse has vinyl Dom 002 Breezew Floor CeilingBeam Door Door Stairs Stairs ExteriorJamb Door Stop Ceiling	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft	nt windows. Lft casing U Ctr Treads	P P P P P P I	AsbShingle AsbShingle Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 1.0	OW OW OW OW OW OW OW OW OW OW OW OW OW O
108 109 Comme Exter 110 121 118 115 113 114 116 117 119	D D D D D D D D D D D D D D D D D D D	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Door Stairs Stairs ExteriorJamb Door Stop Ceiling Soffit	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Lft Lft	nt windows. Lft casing U Ctr Treads Risers	P P P P P I I	AsbShingle AsbShingle Concrete Concrete Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3	OW OW OW OW OW OW OW OW OW OW OW OW OW O
108 109 Comme 110 121 118 115 113 114 116 117 119	D D D D D D D D D D D D D D D D D D D	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Stairs Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Lft Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 0.3 -0.2	OW OW OW OW OW OW OW OW OW OW OW OW OW O
108 109 Comme 110 121 118 115 113 114 116 117 119 122 111	D D D D D D D D D D D D D D D D D D D	Wall Wall Douse has vinyl Doom 002 Breezew Floor CeilingBeam Door Stairs Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs Stairs	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Ctr Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 0.3 -0.2 -0.2	OW OW OW OW OW OW OW OW OW OW OW OW OW O
108 109 20mme 110 21 118 113 114 116 117 119 122 111 12	D D D D D D D D D D D D D D D D D D D	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Stairs Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Lft Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 0.3 -0.2	OW OW OW OW OW OW OW OW OW OW OW OW OW O
108 109 Comme 110 121 118 115 113 114 116 117 119 122 111	D D D D D D D D D D D D D D D D D D D	Wall Wall Douse has vinyl Doom 002 Breezew Floor CeilingBeam Door Stairs Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs Stairs	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Ctr Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 0.3 -0.2 -0.2	OW OW OW OW OW OW OW OW OW OW OW OW OW O
108 109 Comme 110 121 118 115 113 114 116 117 119 122 111	D D D D D D D D D D D D D D D D D D D	Wall Wall Duse has vinyl Dom 002 Breezew Floor CeilingBeam Door Stairs Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs Stairs CeilingBeam	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Ctr Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 -0.2 -0.2 0.6	MC MC MC MC MC MC MC MC MC MC MC MC MC M
108 109 Comme Exter 110 121 118 115 113 114 116 117 119 122 111 112 120	D D D D D D D D D D D D D D D D D D D	Wall Wall Duse has vinyl Doom 002 Breezew Floor CeilingBeam Door Door Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs Stairs CeilingBeam Door Stairs	Lft L Rgt L Rgt replaceme ay Ctr Lft Lft Lft Lft Lft Ctr Ctr Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete Concrete Concrete Concrete		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 -0.2 -0.2 0.6	M QM QM QM QM QM QM QM QM QM Q
108 109 Comme Exter 110 121 118 115 113 114 116 117 119 122 111 122 20	D D D D D D D D D D D D D D D D D D D	Wall Wall Douse has vinyl Doom 002 Breezew Floor CeilingBeam Door Door Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs CeilingBeam CeilingBeam Com 003 Garage Foundation	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Ctr Ctr Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P I I P	AsbShingle AsbShingle Concrete Concrete Concrete Concrete Concrete Concrete Aluminum		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 -0.2 -0.2 0.6	OW OW OW OW OW OW OW OW OW OW OW OW OW O
108 109 Comme Exter 110 121 118 115 114 116 117 119 122 111 112 120 Exter 31 28 29	D D D D D D D D D D D D D D D D D D D	Wall Wall Douse has vinyl Doom 002 Breezew Floor CeilingBeam Door Door Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs CeilingBeam Oom 003 Garage Foundation OvrHdDrCsng	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Ctr Ctr Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete Concrete Concrete Aluminum Aluminum		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 -0.2 -0.2 0.6	M M M M M M M M M M M M M M
108 109 Comme 110 121 118 115 113 114 116 117 119 122 111	D D D D D D D D D D D D D D D D D D D	Wall Wall Douse has vinyl Doom 002 Breezew Floor CeilingBeam Door Door Stairs ExteriorJamb Door Stop Ceiling Soffit Stairs CeilingBeam Oom 003 Garage Foundation OvrHdDrCsng OvrHdDrJamb	Lft L Rgt L Rgt replaceme ay Ctr Ctr Lft Lft Lft Lft Lft Ctr Ctr Ctr Ctr Ctr Ctr	nt windows. Lft casing U Ctr Treads Risers	P P P P P P P P P P P P P P P P P P P	AsbShingle AsbShingle Concrete Concrete Concrete Concrete Concrete Concrete Aluminum		0.4 0.0 1.0 0.1 0.0 -0.1 2.2 0.1 0.0 1.0 0.3 -0.2 -0.2 0.6	OW OW OW OW OW OW OW OW OW OW OW OW OW O

Readin					Paint			Lead	
No.	Wall	Structure	Location	Member	Cond	Substrate	Color	(mg/cm²)	Mode
135	c	ExteriorJamb	Ctr	<u> </u>	I	Aluminum		0.0	QM
126	D	Wall	L Lft		P	Aluminum		-0.1	QM
127	Ð	Soffit			P	Aluminum		0.3	QM
132	D	Soffit			P	Aluminum		0.2	QΜ
124	D	Window	Ctr	Sash	P			3.6	QM
125	D	Window	Ctr	Sill	P	Aluminum		1.0	QΜ
123	D	Window	Ctr	Lft casing	P	Aluminum		1.0	МQ
Inter	cior R	oom 001 Living	Rm	 	 ,				
005	A	Floor			I			0.0	ДМ
007	A	Window	L£t	Sill	I			-0.1	QM
006	A	Window	Lft	Lft casing	I			0.4	QM
016	A	Door	Lft	Rgt jamb	I			0.1	QM
008	A	Door	Lft	Rgt casing	I			0.1	QM
009	A	Door	Lft	U Ctr	I	Metal		0.0	ΩM
010	A	ExteriorDoor	Lft	= =="	Ī	. —		-0.3	QM
011	A	ExteriorJamb	Lft		Ī			0.3	QΜ
014	Ĉ	Door	Rgt	Lft casing	Ī			0.2	QM
015	c	Door	Rgt	Lft jamb	ī			-0.1	QM
012	D	Wall	U Rgt	مسور بعد	Ī			-0.3	QM
013	D	Baseboard	Rat		Ī			0.1	QM
	-9								
		oom 002 Kitchen	· · · · · · · · · · · · · · · · · · ·						
Inter		oom 002 Kitchen Wall	U Ctr	المستمين من من المستمين والأرب المستمين المستمين المستمين المستمين المستمين المستمين المستمين المستمين المستمين	I			-0.1	ДМ
Inter 020	ior R				I I		<u> </u>	-0.1 0.0	Фи Фи
Inter 020 017	rior R	Wall		Rgt jamb					
Inter 020 017 023	rior Ro A A	Wall Ceiling	U Ctr	Rgt jamb Rgt casing	I		and the state of 	0.0	QM
Inter 020 017 023 021	rior R A A A	Wall Ceiling Door	U Ctr Lft	Rgt casing U Ctr	I		and the second seco	0.0 -0.1	Ф М Ф М
Inter 020 017 023 021 022	rior Ro A A A	Wall Ceiling Door Door	U Ctr Lft Lft	Rgt casing U Ctr Wall	I I		and the second seco	0.0 -0.1 0.0	ДW ФМ
Inter 020 017 023 021 022 024	rior R A A A A	Wall Ceiling Door Door Door	U Ctr Lft Lft Lft	Rgt casing U Ctr	I I I		<u> - in transmitter age</u> —— re pr	0.0 -0.1 0.0 0.1	Ф М Ф М
Inter 020 017 023 021 022 024	rior R A A A A A	Wall Ceiling Door Door Door Closet	U Ctr Lft Lft Lft Lft	Rgt casing U Ctr Wall	I I I		and the state of t	0.0 -0.1 0.0 0.1 -0.2	ÖW ÖW ÖM ÖM
Inter 020 017 023 021 022 024 025	rior R A A A A A A A	Wall Ceiling Door Door Door Closet Closet	U Ctr Lft Lft Lft Lft Lft	Rgt casing U Ctr Wall	I I I I		unik er energiün egyen meneren	0.0 -0.1 0.0 0.1 -0.2 -0.1	OW OW OW OW
Inter 020 017 023 021 022 024 025 032	rior R A A A A A A A	Wall Ceiling Door Door Door Closet Closet Wall	U Ctr Lft Lft Lft Lft Lft U Ctr	Rgt casing U Ctr Wall	I I I		wake na antikin ayyo mana ye	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1	M QM QM QM QM QM QM
Inter 020 017 023 021 022 024 025 032 033 018	rior R A A A A A A B B	Wall Ceiling Door Door Closet Closet Wall Chair rail	U Ctr Lft Lft Lft Lft Lft Ctr Ctr	Rgt casing U Ctr Wall	I I I I I I		andro an	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1	ÖW ÖW ÖW ÖM ÖM
Inter 020 017 023 021 022 024 025 032 018 019	A A A A A A B B	Wall Ceiling Door Door Closet Closet Wall Chair rail Wall	U Ctr Lft Lft Lft Lft Lft Ctr Ctr U Lft	Rgt casing U Ctr Wall	I I I I I I I I		andro in a control land aggree — more per	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3	ÖW ÖW ÖW ÖW ÖW ÖW
Inter 020 017 023 021 022 024 025 032 018 019	rior ReAAAAAABBBCC	Wall Ceiling Door Door Closet Closet Wall Chair rail Wall Baseboard	U Ctr Lft Lft Lft Lft Lft Ctr Ctr U Lft Lft	Rgt casing U Ctr Wall	I I I I I I		andro transcribilian aggin — more per	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3	ÖW ÖW ÖW ÖW ÖM ÖM
Inter 020 017 023 021 022 024 025 032 018 019 034 028	rior ReAAAAAABBCCCD	Wall Ceiling Door Door Closet Closet Wall Chair rail Wall Baseboard Wall	U Ctr Lft Lft Lft Lft Ctr Ctr U Lft Lft U Rgt	Rgt casing U Ctr Wall Shelf Sup.	1 1 1 1 1 1		andro transcribilities aggress and per	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0	ÖM ÖM ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 032 018 019 034 028	rior ReAAAAAABBCCCDD	Wall Ceiling Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window	U Ctr Lft Lft Lft Lft Ctr Ctr U Lft Lft U Rgt Ctr	Rgt casing U Ctr Wall Shelf Sup.	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Metal	wike ne	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0	ÖM ÖM ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 032 018 019 034 028 027	rior R A A A A A B B C C D D	Wall Ceiling Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window	U Ctr Lft Lft Lft Lft Ctr Ctr U Lft Lft U Rgt Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal	wike negotivities gype — negotiv	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0	ÖW ÖW ÖW ÖW ÖW ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 028 027 026	nior R	Wall Ceiling Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door	U Ctr Lft Lft Lft Lft Ctr Ctr U Lft Lft U Rgt Ctr Rgt	Rgt casing U Ctr Wall Shelf Sup.		Metal	wike negotivities gype — negotiv	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0	ÖW ÖW ÖW ÖW ÖW ÖW ÖW
Inter 020 017 023 021 022 024 025 033 018 019 034 027 026 029 030	rior R	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall	U Ctr Lft Lft Lft Lft Ctr Ctr U Lft U Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal	under verschilder eigen men verschen.	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1	ÖW ÖW ÖW ÖW ÖW ÖW ÖW ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 027 026 029 030 031 Comme	rior R A A A A B B C C D D D D D D D T D D T D D D D D D D	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo	U Ctr Lft Lft Lft Ctr Ctr U Lft U Ctr Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0	ÖW ÖW ÖW ÖW ÖW ÖW ÖM ÖM
020 017 023 021 022 024 025 033 018 019 034 028 027 026 029 030 031 Comme	rior R A A A A B B C C D D D D D D T C C T T T T T T T T T	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo	U Ctr Lft Lft Lft Lft U Ctr Ctr U Lft Lft U Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 0.4	OW OW OW OW OW OW OW OW OW
Inter 020 017 023 021 022 024 025 033 018 019 034 028 027 026 029 030 031 Comme	rior R A A A A B B C C D D D D D D T T T T T T T T T T T T	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo	U Ctr Lft Lft Lft U Ctr U Lft U Rgt Ctr Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 0.4	ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 028 027 026 029 030 031 Comme	rior R A A A A B B C C D D D D D D T C C C A A A	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo	U Ctr Lft Lft Lft Lft U Ctr Ctr U Lft Lft U Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 0.4 0.1	ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 027 026 029 030 031 Comme	rior R A A A A B B C C D D D D D D T T T T T T T T T T T T	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo Doom 003 Hallway Wall Chair rail Ceiling	U Ctr Lft Lft Lft Lft U Ctr Ctr U Lft Lft Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal	en e	0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 -0.4	ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 027 026 029 030 031 Comme	rior R A A A A B B C C D D D D D D T C C C A A A	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo	U Ctr Lft Lft Lft U Ctr U Lft U Rgt Ctr Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.0 0.0 -0.4 -0.2 -0.4	ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 027 026 029 030 051 Comme Inter 036 037 038	rior R A A A A B B C C D D D D D D T C C C C C C C C C C C	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo Doom 003 Hallway Wall Chair rail Ceiling	U Ctr Lft Lft Lft Lft U Ctr Ctr U Lft Lft Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 -0.4	ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 027 026 029 030 031 Comme Inter 036 037 039	rior Ro A A A A A B B C C C D D D D D D D D D D D D D D D	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo Doom 003 Hallway Wall Chair rail Ceiling Wall	U Ctr Lft Lft Lft Lft U Ctr Ctr U Lft Lft Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ct	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 -0.4	ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 022 024 025 033 018 0034 0027 0029 030 031 0037 0035 0039 0039	rior Ro A A A A B B C C D D D D D D D D D D C C C C A A A B B C C C C C C C C C C C	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo Doom 003 Hallway Wall Chair rail Ceiling Wall Wall	U Ctr Lft Lft Lft Lft U Ctr Ctr U Lft Lft Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ct	Rgt casing U Ctr Wall Shelf Sup.		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 -0.4	ÖW ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 027 026 029 030 031 Comme Inter 036 037 038 039 043	cior R A A A A B B C C D D D D D D C cior R A A B C C	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo Doom 003 Hallway Wall Chair rail Ceiling Wall Wall Door	U Ctr Lft Lft Lft Lft Lft U Ctr Ctr U Lft Lft Ctr Ctr Rgt Ctr Ctr Ctr Ctr Ctr U Ctr U Lft	Rgt casing U Ctr Wall Shelf Sup. Sill Lft casing U Ctr		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 -0.4	ÖW ÖW ÖW ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM
Inter 020 017 023 021 022 024 025 033 018 019 034 028 027 026 029 030 031 Comme	cior R A A A A B B C C D D D D D D C C C C C C C C	Wall Ceiling Door Door Door Closet Closet Wall Chair rail Wall Baseboard Wall Window Window Door CabinetFrame CabinetDoor CabinetWall inoleum on floo Doom 003 Hallway Wall Chair rail Ceiling Wall Wall Door Door	U Ctr Lft Lft Lft Lft U Ctr Ctr U Lft U Rgt Ctr Ctr Ctr Ctr Ctr Ctr Ctr Ctr U Lft	Rgt casing U Ctr Wall Shelf Sup. Sill Lft casing U Ctr Rgt jamb Rgt casing		Metal		0.0 -0.1 0.0 0.1 -0.2 -0.1 0.3 -0.3 0.0 0.0 0.0 0.4 0.1 0.0 0.0 -0.4	ÖW ÖW ÖW ÖW ÖW ÖW ÖW ÖW ÖM ÖM

No.	g Wall	Structure	Location	Member	Paint Cond	Substrate Color	Lead (mg/cm²)	Mode
046	C	Closet	Lft	Shelf	I		0.1	QM
040	D	Wall	U Ctr		I		-0.2	QM
Comme	ent: Li	inoleum on flo	oor. Lower	walls beadbo	pard pa	meling.		
Inter	ior R	om 004 C/D Be	edrm		····		**************************************	
049	A	Wall	U Rgt		I		-0.2	QM
048	A	Floor	_		I		-0.2	QM
047	A	Ceiling			I		-0.6	QM
050	В	Wall	L Lft		I		-0.1	QM
058	В	Door	Ctr	Rgt jamb	I		-0.1	QΜ
056	В	Door	Ctr	Rgt casing	I		0.1	QM
057	В	Door	Ctr	U Ctr	I		-0.3	MQ
059	В	Closet	Ctr	Wall	I		-0.1	MQ
060	В	Closet	Ctr	Shelf Sup.	I		0.0	QM
051	С	Wall	U Rgt	_	I		0.1	MQ
055	C	Baseboard	Ctr		I		-0.2	QM
054	С	Window	Ctr	Sill	I		0.0	QM
053	C	Window	Ctr	Lft casing	I		0.2	QM
052	D	Wal1	L Lft		I		-0.1	QΜ
Inter	ior Ro	oom 005 Bathro			 ,	000000000000000000000000000000000000000		
063	A	Wall	U Ctr		I		-0.3	QM
062	A	Floor			I	CeramcTile	-0.3	QM
061	A	Ceiling			I		0.0	ΩM
070	A	Door	Ctr	Rgt jamb	I		0,1	ΩM
069	A	Door	Ctr	Rgt casing	I		0.0	QM
071	Α	Door	Ctr	U Ctr	I		0.0	QM
064	В	Wall	U Lft		I		-0.1	QM
065	С	Wall	U L£t		I		-0.1	QM
068	С	Window	Ctr	Sill	I		0.0	QM
067	С	Window	Çtr	Lft casing	I		0.1	QM
066	D	Wall	U Rgt		I		-0.2	QM
COmme		ower walls bea	adboard pan	errug.				
		oom 006 B/C Be						
073	A	Wall	edrm U Ctr		I		-0,2	QM
073 074	A A	Wall Floor			I	,,,,,	0.0	QM QM
073 074 072	A A A	Wall Floor Ceiling	U Ctr		I		0.0 -0.2	QM QM
073 074 072 082	A A A B	Wall Floor Ceiling Wall	U Ctr L Lft		I I		0.0 -0.2 -0.1	MQ MQ MQ
073 074 072 082 084	A A A B	Wall Floor Ceiling Wall Window	U Ctr L Lft Ctr	sill	I I I		0.0 -0.2 -0.1 0.3	OW OW OW
073 074 072 082 084 083	A A B B	Wall Floor Ceiling Wall Window Window	U Ctr L Lft Ctr Ctr	Sill Lft casing	I I I		0.0 -0.2 -0.1 0.3 0.1	OW OW OW OW
073 074 072 082 084 083	A A B B C	Wall Floor Ceiling Wall Window Window Wall	U Ctr L Lft Ctr Ctr U Rgt		I I I		0.0 -0.2 -0.1 0.3 0.1 -0.5	ÖW ÖW ÖW ÖW
073 074 072 082 084 083 081	A A B B C D	Wall Floor Ceiling Wall Window Window Wall Wall	U Ctr L Lft Ctr Ctr U Rgt U Rgt		I I I I		0.0 -0.2 -0.1 0.3 0.1 -0.5	M M M ÖM ÖM ÖM
073 074 072 082 084 083 081 075	A A B B C D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard	U Ctr L Lft Ctr Ctr U Rgt U Rgt Ctr	Lft casing	I I I I I I		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0	ÖW ÖW ÖW ÖW ÖM
073 074 072 082 084 083 081 075	A A B B C D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door	U Ctr L Lft Ctr Ctr U Rgt U Rgt Ctr Lft	Lft casing	I I I I I		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2	OW OW OW OW OW OW
073 074 072 082 084 083 081 075 076 079	A A B B B C D D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door	U Ctr L Lft Ctr Ctr U Rgt U Rgt Ctr Lft	Lft casing Rgt jamb Rgt casing	I I I I I		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1	OW OW OW OW OW OW OW
073 074 072 082 084 083 081 075 076 079	A A B B C D D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3	ÖW ÖW ÖW ÖM ÖM ÖM ÖM ÖM
073 074 072 082 084 083 081 075 076 077	A A B B B C D D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door	U Ctr L Lft Ctr Ctr U Rgt U Rgt Ctr Lft	Lft casing Rgt jamb Rgt casing	I I I I I		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1	OW OW OW OW OW OW OW
073 074 072 082 084 083 081 075 076 079 077 078 080	A A B B C D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3 0.2	ÖW ÖW ÖW ÖW ÖW ÖW ÖM
073 074 072 082 084 083 081 075 076 079 077 078 080	A A B B C D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door Closet	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3 0.2	QM QM QM QM QM QM QM QM QM QM
073 074 072 082 084 083 081 075 076 077 078 080 Calib	A A B B C D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door Closet	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3 0.2	OM OM OM OM OM OM OM OM OM OM OM OM
073 074 072 082 084 083 081 075 076 077 077 080 Calib 001	A A B B C D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door Closet	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3 0.2	QM QM QM QM QM QM QM QM QM QM
073 074 072 082 084 083 081 075 076 077 078 080 Calib 001 002 003	A A B B C D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door Closet	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3 0.2	OM OM OM OM OM OM OM OM OM OM OM OM OM O
073 074 072 082 084 083 081 075 076 077 078 080 Calif 001 002 003 004 136	A A B B C D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door Closet	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3 0.2	QM QM QM QM QM QM QM QM QM QM QM TC TC
073 074 072 082 084 083 081 075 076 077 078 080 Calif 001 002 003	A A B B C D D D	Wall Floor Ceiling Wall Window Window Wall Wall Baseboard Door Door Closet	U Ctr Lft Ctr Ctr U Rgt U Rgt Ctr Lft Lft	Lft casing Rgt jamb Rgt casing U Ctr	1 1 1 1 1		0.0 -0.2 -0.1 0.3 0.1 -0.5 0.0 0.2 -0.2 0.1 -0.3 0.2	OM OM OM OM OM OM OM OM OM OM OM OM OM O

eading	* **			Paint	* *		Lead	
No, Wall	Structure	Location	Member	Cond	Substrate	Color	(mg/cm²)	Mode
139	- A1 /1-00000000 10 A1					w	-0.1	TĊ

SUMMARY REPORT OF LEAD PAINT INSPECTION FOR: Stanley Relva

Inspection Date:

10/08/14

121 Northside Drive

Report Date:

10/17/2014

Torrington, CT 06790

Abatement Level: Report No.

1.0

S#01109 - 10/08/14 13:43

Total Readings: Job Started:

139 Actionable: 15

10/08/14 13:43

Job Finished:

10/08/14 15:15

Readin	g				Paint		Lead	
Ņο.	Wall	Structure	Location	Member	Cond	Substrate Color	(mg/cm²)	Mode
Exter	cior R	oom 001 Exterio)F			andrew and the second s		V-011. 1
086	Α	Wall	L Rgt		P	AsbShingle	1.0	ΔW
091	A	Window	Rgt	Lft casing	P		1.0	ДM
092	A	DrOverhang	Ctr		P		3.7	QM
096	B	Wall	L Rgt		₽	AsbShingle	1.0	QM
104	C	Window	Lft	Sill	P		2.6	QM
109	D	Wall	L Rgt		P	AsbShingle	1,0	QM
Exter 115	rior R B	oom 002 Breezew Door	ay Lft	U Ctr	P		2.2	QM
115	·B	Door	Lft	U Ctr	P		2.2	QM
116	В	ExteriorJamb	Lft		P		1.0	QМ
117	В	Door Stop	Lft		P		1.0	MQ
Exter	cior R	oom 003 Garage	- :	<u></u>	<u> </u>	· · · · · · · · · · · · · · · · · · ·		<u>~ </u>
129	A	OvrHdDrJamb	Ctr		I	Aluminum	1.0	QM
130	A	OverheadDoor	Ctr		P	Wood	1.6	QM
134	С	Door	Ctr	U Ctr	P		3.6	QΜ
124	D	Window	Ctr	Sash	P		3.6	MQ
125	D	Window	Ctr	Sil1	P	Aluminum	1.0	QM
123	D	Window	Ctr	Lft casing	P	Aluminum	1.0	MQ.
		نهر داده	End of	Readings				

Analysis Report



Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117 804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer:

SAFE HOMES (677)

Address:

Attn:

Project: Location: 493 Willow St.

WATERBURY, CT 06710

Order #:

112370

Matrix

Received

Analyzed

10/09/14 10/09/14

Wipe

Reported

10/09/14

Number:

121 Northside

PO Number:

	الروان المروور فيوران الموساوات المراجع		and the same of the same of	The state of the s			
Sample ID	Cust. Sample ID	Location	Sample Date			***	
Parameter		Method		Area	Total	Conc.	RL
112370-001	1	Kitchen Floor	10/08/14	and the second s			
Lead		EPA 7000B / 3050B		1,00 ft2	<10.0 µg/wipe	<10,0 µg/ft2	10.0 µg/ft2
112370-002	2	Kitchen Sill	10/08/14				
Lead		EPA 7000B / 3050B			133 µg/wipe		40.0 µg/wipe
		No Area Given					
112370-003	3	Blank	10/08/14				
Lead		EPA 7000B / 3050B			<10.0 µg/wipe		10:0 µg/wipe

Analyst: MHB

112370-10/09/14 0.6:20 PM

Reviewed By: Mohammed Eltilib Metals Team Leader

Minimum Total Reporting Limit: 10.0 μg/wipe: EPA Clearance Std: 40 μg/ft² for floors, 250 μg/ft² for interior window sills, and 400 μg/ft² for window troughs. All Internal QC parameters were met. Unusual sample conditions, if any, are described. Surrogate Spike results designated with "D" indicate that the analyte was diluted out. "MI" indicates matrix interference, Concentration and Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The analysis data reported relates only to the samples as submitted.

GENERAL CONSTRUCTION NOTES

- 1. The Contractor shall perform the work to accommodate to the greatest extent reasonable the normal use of the premises by the Owner during the construction period.
- 2. It is the Owners intention to proceed with the dwelling occupied during the entire construction project. Coordinate with the Owner in all construction operations to minimize conflict, and to facilitate the Owner usage of the dwelling, parking, and access to the building.
- 3. The Contractor shall maintain containment within the work area when performing lead based paint reduction activities as required, until such time as clearance is received.
- 4. The Contractor shall coordinate any and all short-term interruptions or shutdowns with the Owner prior to commencing.
- 5. The Contractor shall take every precaution to ensure the safety of the occupants during all phases of construction. The Contractor shall to the greatest extent reasonable maintain a least one exit for access. Coordinate restrictions and closures with Owner.
- 6. The Contractor shall be responsible for protecting the dwelling and contents from weather and damage during construction, and shall be responsible for the repair and or replacement of any damage to the building and or contents until completion of the contract.
- 7. The Contractor shall assume full responsibility for the protection and safekeeping of his materials and products under this Contract stored on the site. The Contractor shall move any stored products under the Contractor's control which interfere with operations of the owner.

PROJECT MEETINGS

- 1. The selected Contractor shall attend a contract signing meeting as scheduled by the Owner, and Consultant.
- 2. The selected Contractor shall attend periodic job meetings during the course of construction, on site, as required.

PRODUCT AND EXECUTION

- 1. Workers shall be experienced and skillful in performing the work assigned to them.
- 2. Contractor shall verify critical dimensions, operations and functions in the field before ordering or fabricating items which must fit adjoining construction. The Contractor shall verify all existing conditions and dimensions prior to the work. Any and all discrepancies shall be reported to the Owner and Consultant prior to ordering any materials or performing the work.
- 3 The Contractor shall follow manufacturer's instructions for assembly, installation and product adjustment. In the event of conflicting specifications the specifications of the manufacturer shall prevail.
- 4. In the event unforeseen circumstances the Contractor shall notify the Owner and Consultant within 24 hours of discovery. If the work is deemed additional or extra by the Consultant then a change order will be negotiated, executed and authorized by the Contractor, Owner and Consultant prior to the commencement of the work. Any work performed prior to the execution of a change order may or may not be considered for payment.
- 5. The specifications do not attempt to detail every task and procedure required to perform the work in full. The Contractor shall perform the work as required to complete the work in a professional manner using customary trade practices and standard work practices.

REMOVAL OF DEBRIS AND SITE MAINTENANCE

- The contractor shall include in their bid the cost of trash containers and the removal and lawful disposal of said debris off site.
- 2. The Contractor shall coordinate with the Owner for the placement of trash containers if necessary prior to the start of demolition.
- 3. The Contractor shall be responsible for the daily clean up and maintenance of the site. All debris, construction materials, scrap, rubbish etc. shall be placed in a trash container or dumpster on a daily basis. Sidewalks, driveways and pedestrian ways shall be broom swept at the end of each day.

MATERIAL DELIVERY, STORAGE AND HANDLING

- 1. The Contractor shall determine and comply with manufacturer's recommendation on product handling, storage installation and protection.
- 2. Products shall be delivered to the job site in their manufacturers' original containers, with labels intact and legible. Do not deliver materials to job site until they can be properly protected.
- 3. Maintain packaged materials with seals unbroken and labels intact until time of use.
- 4. The Owner and or Consultant may reject materials and products which do not bear identification satisfactory to the Owner or Consultant

SUBMITTAL

The following list of submittals is for the convenience of all parties concerned it is not necessarily a complete list of all submittals required.

- 1. Submit the following before the start of work:
 - a. Copy of building permit.
 - b. Construction schedule.
 - c. Material submittals if not using materials as specified.
- 2. Submittals before Certificate of Completion and final payment.
 - a. Acceptance of work from local Building Official.
 - b. All warranty and guarantee information
 - c. Signed and notarized lien waivers from first tier subcontractors and suppliers.

WARRANTIES AND GUARANTEES

1. The Contractor shall issue the Owner a written Notice of Guarantee after the date of receipt of Certificate of Completion. Submit to the Owner on letterhead in the following form:

Name of Project and date

I/We, (FIRM NAME), hereby warrant, and guarantee workmanship on labor for the renovations performed at (OWNER'S ADDRESS), as per contract signed on (DATE OF CONTRACT) for a period of one (1) year from the date of the Certificate of Completion. Signed

ROOFING AND VENTILATION

GENERAL

1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all materials, labor, equipment and services necessary, to perform and complete the work specified herein and or as required by job conditions.

INTENT

- 1. The intent of the proposed work is to remove and dispose of all roofing materials from the house and garage roofs.
- 2. Provide and install 30 year rated, architectural, strip type shingles including but not limited to metal rake and drip edging, ice & water shield, shingle underlayment, ridge vents, plumbing boots, and flashings.

REFERENCES

- 1. ASTM D 224 Standard Specifications for Smooth Surfaces Asphalt Roll Roofing
- 2. ASTM D226 Standard Specifications for Asphalt Saturated Organic Felt used in Roofing & Waterproofing
- 3. ASTM D 3018 Standard Specification for Class A Shingles Surfaced with Mineral Granules.
- 4. ASTM 3161 Standard Test Method for Wind Resistance of Asphalt Shingles (Fan Induced Method)
- 5. ASTM 3462 Standard Specification for Asphalt Shingles Made from Glass felt and Surfaced with Mineral Granules.
- 6. ASTM 4586 Standard Specification for Asphalt Roof Cement, Asbestos Free
- 7. ASTM D4869 Standard Specification for Asphalt Saturated Organic Felt Shingle Underlayment used in roofing.
- 8. ASTM D 6757 Standard Specifications for Inorganic Underlayment for Use with Steep Slope Roofing
- 9. ASTM E 108 Standard Test Methods for Fire Tests of Roof Coverings.

MATERIALS

- 1. Rake & Drip Edge White aluminum rake & drip. Drip edge shall be 5" wide.
- 2. Underlayment . GAF "Shingle Mate" or approved equal for strip type shingles and GAF "Roof Pro" for SBS roofing application. Underlayment shall conform to ASTM D226, Type 1 or ASTM D4869 type 1.
- 3. Leak Barrier GAF "Weather Watch" mineral surfaced leak barrier or approved equal. Material shall conform to the requirements of ASTM D 1970. Thickness to be min. 40 mils. Tensile strength MD (lbf/in) minimum 25.
- 4. Starter Strip Shingles shall be Pro Start eave and rake starter strip as manufactured by GAF or approved equal.
- 5. Laminated fiberglass shall be GAF Timberline HD Shingles or approved equal. Shingles shall carry Underwriter's Laboratories labels, UL® 790 Class A Fire Resistance, UL® 997, Wind Resistance and ASTM D3462. Shingles shall be Class A, strip type, self sealing
- 6. Hip and ridge shingles shall be Seal A Ridge, ridge cap shingles as manufactured by GAF or approved equal
- 7. Ridge Vent GAF "Cobra Ridge Vent, or approved equal.
- 8. Fasteners Aluminum or galvanized sharp pointed conventional roofing nails with smooth shanks, minimum 3/8" diameter head and of sufficient length to penetrate 3/4" into solid decking or penetrate through plywood sheathing. Provide 6 nails per full shingle. Staples are not acceptable.
- 9. Roof boots/ Flashing Vents EPDM rubber-aluminum boots.
- 10. Flashing cement trowel grade non asbestos mineral- fibered roofing mastic ASTM D-2822 Type 1 and ASTM D-4586 Type 1, equivalent to Karnak.
- 11. Step and roll flashing Aluminum 0.040" thick, color mill finish.
- 12. Chimney flashing step and counter flashing, lead flashing.

SHINGLE REMOVAL

- 1. Remove and legally dispose of existing roofing materials such as but not limited to, roof boots, roof vents, plumbing boots, flashing materials, rake and drip edge, felt paper and fasteners from roof.
- 2. Contractor shall remove only as much material as can be replaced in a single work day. Contractor shall be responsible for any water damage to the structure and to Owners' property as a result of inadequate protection.
- 3. Removal work shall be done in a manner and by such means as is necessary to protect the buildings from damage; to cause minimum interruption to activities; to avoid hazard or injury to persons or property during the entire construction project.
- 4. Inspect roof sheathing, if after shingle removal decking surfaces are determined to be inappropriate for installation of new roofing, Contractor shall notify the Owner & Consultant of any decking which requires replacement.

Unit Price #1: Remove existing damaged or rotted decking and install new ½" plywood decking. Provide APA exterior exposure plywood. Include all required labor and materials in cost per 4'X 8' sheet. Do not include in base bid

\$_____/ 4 x 8 sheet

PREPARATION OF ROOF DECK

- 1. The contractor shall inspect the entire area to be roofed and verify it is clean and free of debris, nails, or any other item which may cause interference with the installation of the new roofing materials.
- 2. <u>Install a minimum of two (2) courses</u> of ice & water shield along all eaves extending a minimum of 24" beyond heated wall. Install full coverage ice & water barrier on any roof with less than a 4"/12" pitch.
- 3. Install full sheet of ice & water barrier centered in valleys allowing for 18" overlap onto either roof deck. Overlap minimum of 6" at head laps.
- 4. Install (18") eighteen inch wide strip of ice & water barrier along the rakes. Overlap and seal joints a minimum of 6".
- 5. Install a minimum of 18" x 18" piece of ice & water shield around any roof penetrations such as vent, hoods, plumbing stacks etc.
- 6. Install new metal rake and drip edge on all rakes and eaves. Fasten new metal edging every 8" on center using approved fasteners.

- 7. Install roofing underlayment over all roof decks to receive new roofing. Lap each course a minimum of 6" over lower course, and side lapping 4" at all joints.
- 8. Install underlayment on remaining areas of roof upon completion of installing ice & water barrier.

SHINGLE ROOFING

- 1. Install roofing as follows:
- 2. Install starter course along eaves per manufacturer's written instructions.
- 3. Install shingles per manufacturer's written instructions. Apply six nails per full shingle. Fasten shingles at or below nailing line. Maintain six inch (6") clearance from butt end of proceeding course with any fasteners. Install shingles to meet wind zone requirements per the local building code.
- 4. Contractor shall provide one additional unbroken bundle of shingles identical to those installed for the Owners usage in the event of future need.

VALLEY

1. Valleys shall be constructed using a closed cut style installation. Install shingles as per shingle manufacturer's written instructions. Install shingles on smaller area of roof and extend a minimum of 24" beyond center of valley. Contractor shall not nail within the valley. Over lay shingles from larger area of roof over new valley shingles and cut to form straight line centered in valley.

ROOF BOOTS

1. Replace existing roof boots and install EPDM rubber-aluminum roof boots on all plumbing vents as existing. Boot shall have soft rubber gasket.

RIDGE VENT

- 1. Cut through roof sheathing parallel with ridge down approximately 1" on either side of ridge board.
- 2. Provide and install Cobra-Roll Vent or approved equal in accordance with manufacturer's installation instructions.
- 3. Cap over new vent with roofing manufacturers ridge cap shingles. Fasten with appropriate sized galvanized roofing nails.

FLASHING

1. Provide and install aluminum 5" x 7" step flashing as required at gable walls. Contractor may re-use existing flashing to greatest extent possible.

CHIMNEY FLASHING

- 1. Remove and dispose of existing step flashing at all chimneys.
- 2. Provide and install new lead step flashing as required for water tight installation.

Cost:	\$	

GUTTERS

GENERAL: This specification includes all labor, materials, taxes and permits required to perform the gutter work described below. All work must conform to applicable building codes. Coordinate with the work of other trades specified elsewhere.

INTENT

- 1. The intent of the proposed work is to remove and dispose of all existing house and garage gutters and leaders.
- 2. Provide and install new gutters and leaders as specified below.

GUTTERS

- 1. Provide and install new aluminum gutters and leaders on all eaves of the house and garage, owner to have choice of stock gutter colors.
- 2. Gutters shall have a minimum wall thickness of .032, Pitch gutter 1/8" per foot towards downspouts.
- 3. Provide and install aluminum leaders, at each down spout. Leaders shall have a minimum wall thickness of .019.
- 4. Fasten gutters 24" on center maximum to fascia or roofing with concealed brackets or hangers. If hangers are used, hangers shall be installed under the first course of roofing and not face nailed. Elbow drain pipes back to side wall of building and fasten leaders using concealed brackets. Fasten 6'-8' maximum spacing.

Cost:	\$

WINDOWS

GENERAL

1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all materials, labor, equipment and services necessary, to perform and complete the work specified herein and or as required by job conditions.

INTENT

- 1. The intent of the proposed work is to remove and dispose of all existing windows throughout the house and garage, excluding basement.
- 2. Provide and install new construction windows with factory applied nailing flange and J-channel.

MANUFACTURERS

- 1. Harvey Building Product. Waltham, MA 1-800-598-5400 <u>www.harveyind.com</u> or approved equal.
- 2. Mercury Excelum, East Windsor, CT 1-800-292-1802 www.mercuryexcelum.com or approved equal.

QUALITY ASSURANCE

- 1. Manufacturer Qualifications: Minimum ten (10) years producing vinyl (PVC) windows.
- 2. Source Limitations: Obtain window units from one manufacturer through a single source.
- 3. Provide window units independently tested and found to be in compliance with ANSI/AAMA/NWWDA 101/I.S.2-97 and current A440-05 performance standards listed above.
- 4. Specified fenestration with the following characteristics:
 - a. U-Factor: Less than or equal to 0.30
 - b. Solar Heat Gain Coefficient: Less than or equal to 0.50
- 5. Code Compliance: Provide windows that are labeled in compliance with the jurisdiction having authority over the project.
- 6. Energy Star Rated- windows shall carry Energy Star Rating.

VINYL NEW CONSTRUCTION WINDOW FEATURES

- 1. Provide and install new construction windows as specified below.
- 2. Window frames shall be nominal 0.070 inch (1.8mm) thick polyvinyl chloride (PVC) with miter cut and fusion welded corners. Contoured sash design shall be a nominal 0.070 inch (1.7mm) thickness with fusion welded corners. Color: White.
- 3. Glazing: Low E, 5/8 inch (22mm) nominal thickness, insulated glass units are silicone glazed with an exterior glazing bead.
- 4. Weather Stripping: In compliance with AAMA 701.2.
- 5. Screens: Half screen, with extruded aluminum frame and 18 x 16 charcoal finished fiberglass mesh screening.
- 6. No window grills are not to be included in the window configuration.

INSTALLATION

- 1. Remove existing draperies and reinstall upon window installation as required.
- 2. Provide and install windows in accordance with manufacturer's installation instructions.
- 3. Install windows plumb, level and square so as to operate freely and latch securely.
- 4. Install spun fiberglass insulation within window header and under sill prior to installing window. Insulate between window jambs and vinyl replacement window using spun fiberglass insulation.
- 5. Install new ¾" x ¾" square pine interior stops and fasten with appropriately sized finish nails. Set heads below surface and fill with wood filler. Caulk around window stops and along sill using Phenoseal silicone caulk or approved equal. Paint stops white to match window.
- 6. Paint window stops and jambs in each room.

DOORS

GENERAL

1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all materials, labor, equipment and services necessary, to perform and complete the work specified herein and or as required by job conditions.

INTENT

1. The intent of the proposed work is to remove and dispose of the existing doors and install new doors and storm doors as specified below.

Door Schedule

Location	Туре	Size	Swing	Lockset	Hardware
C Side Garage Entry	Steel entry, no lites, raised colonial panel	Match Original	VIF	Schlage Plymouth Keyed Entry F-51- PLY-505 & deadbolt	As supplied by manufacturer
D Side Basement Entry	Steel entry, no lites raised colonial panel	Match Original	VIF	Schlage Plymouth Keyed Entry F-51- PLY-505 & deadbolt	As supplied by manufacturer
A Side Garage Overhead	Clopay Value Series	Match Original	NA	As supplied by manufacturer	As supplied by manufacturer

INTERIOR & EXTERIOR DOOR MANUFACTURERS

- 1. Masonite International Door Company, One Tampa City Center, 201 N. Franklin Street, Tampa, FL, Tel: 1-800-895-2723, www.masonite.com or approved equal.
- 2. JELD-WEN Door Systems PO Box 1329 Klamatha Falls, OR 97601, Tell: 1-800-535-3936, www.jeld-wen.com or approved equal.

FEATURES (EXTERIOR DOORS)

- 1. Panel 1 ³/₄" thick, cold rolled, 24 gauge galvanized steel
- 2. Jambs Wood
- 3. Hinges -1 $\frac{1}{2}$ pair 3" x 3" loose pin but hinges.
- 4. Sill Adjustable.
- 5. Borings As noted

PRE HUNG DOOR INSTALLATION

- 1. Remove and dispose of existing doors.
- 2. Doors shall be installed in accordance to manufacturer's installation instructions. Install doors plumb and square so as to fit tightly, operate freely and latch securely. Including all required hardware as provided by manufacturer.
- 3. Install spun fiberglass insulation between door jambs and framing, including header and two side jambs.
- 4. Paint all door surfaces and jambs in accordance with the enclosed painting specification.
- 5. Provide and install new interior door casings matching original style and finish.
- 6. Provide and install new locksets as listed in the door schedule.

VINYL SIDING

GENERAL: This specification includes all labor, material, equipment, insurance, taxes and permits required to perform the work as specified below. Coordinate with the work of other trades as specified elsewhere.

INTENT

1. The intent of the proposed work is to remove and dispose of the existing house and garage siding. Provide and install new vinyl siding, wrap all exterior trim with coil stock aluminum, install vented vinyl soffits.

REFERENCES

- 1. ASTM D 635 Standard Method for Rate of Burning of Self Supporting Plastics in a Horizontal Position
- 2. ASTM D 638 Standard Methods for Tensile Properties of Plastics.
- 3. ASTM D 648 Test Method for Deflection Temperature of Plastics under Flexural Load.
- 4. ASTM D 696 Standard Test Method for Coefficient of Linear Thermal Expansion of Plastic Between -30 degree C and 30 degrees C.
- 5. ASTM D 1435 Standard Practice Method for Outdoor Weathering of Plastics.
- 6. ASTM D 1929 Standard Test Method for Ignition Properties of Plastics.
- 7. ASTM D 2843 Standard test Method for Density of Smoke from Burning or Decomposition of Plastics.
- 8. ASTM D 3679 Standard Specification for Rigid Poly Siding.
- 9. ASTM D 4101 Standard Specification for Propylene Plastic Injection and Extrusion.
- 10. ASTM D 4216 Standard Specification for Rigid Poly Compounds and Related Plastic Building Product Compounds.
- 11. ASTM D 4226 Standard Test Methods for Impact Resistance of PVC Building Products.
- 12. ASTM D 4477 Standard Specification for Rigid Poly Soffit.
- 13. ASTM D 5206 Standard Windload Resistance Test.

- 14. ASTM E 84 Standard Test Method for Surface Burning Characteristics of Building Materials.
- 15. ASTM E 119 Standard Test Methods for Fire Test of Building Construction and Materials.

MANUFACTURER

- 1. Provide one of the following manufacturers of siding:
 - a. Alcoa, Silhouette Classic, double 4", brushed, .044 thickness
 - b. CertainTeed, Monogram double 4", brushed, .044 thickness
 - c. Mastic, Quest 3, double 4", brushed, .044 thickness
 - d. Vipco, Market Square, double 4", brushed .044 thickness
- 2. Provide one of the following manufacturers of coil stock:
 - a. Alcoa, .019 thickness.
- 3. Provide one of the following manufacturers of soffit and ceiling material:
 - a. Alcoa / Mastic

Soffit, Pro-Tech Plus triple 4 center vent.

b. CertainTeed / Wolverine

Soffit, Universal triple 4 center vent

- c. Vipco Soffit, Triple 4, center vent
- 4. Polystyrene Insulation
 - a. Dow-Corning

ACCESSORIES

- 1. Provide coordinating accessories for complete and proper installation whether specified or not.
- 2. Schedule of accessories:
 - a. Starter strip, metal
 - b. Corner posts
 - c. Under sill
 - d. F-channel
 - e. J-channel
 - f. Light blocks
 - g. Sill cock / split blocks
 - h. Vinyl shutters (15" wide x full height of window trim) front house only.

FASTENERS

- 1. Provide 1 ½" minimum galvanized or corrosion resistant nail as recommended by manufacturer of siding products for the installation of the siding, soffit and ceiling material.
- 2. Provide $1"-1\frac{1}{4}"$ color coated nails to match aluminum coil stock.

CAULKING

1. Provide 100 % silicone based caulking material. Caulking material shall be color matched to the material where being applied.

DEMOLITION

- 1. Remove and dispose of existing siding and soffits.
- 2. Examine substrate and notify the Owner of any conditions which must be addressed prior to the installation of the new siding. Any items which are deemed to require repair or replacement shall be performed through a change order. Any unauthorized work performed without prior authorization will not be considered valid for payment.

INSTALLATION

- 1. All products shall be installed in accordance to the latest printed installation instruction of the manufacturer
- 2. Provide and install 3/8" extruded polystyrene foam backer board. Install underlayment on all areas to be sided. Cut underlayment tight to openings.
- 3. All components shall be installed true, plumb and square, in accordance to customary trade practices. Fasten siding panels by placing nail centered in nailing slot. Fasten siding every 16" on center. Drive nails straight leaving space between head of the nail and the panel to allow for expansion and contraction. Allow spacing at both ends of the panels and trim for expansion and contraction
- 4. Any accessories that can be removed and remounted on new siding shall be removed and remounted including exterior lights, motion sensors, door bells etc. Any item which cannot be removed shall be equipped with a split light block, such as water spigots. The siding contractor shall review the items with the Consultant that can and can not be removed and remounted prior to commencing work.
- 5. Splice new siding around electrical conduit penetrating building.

6. Install white triple 4 soffit materials on all eaves, soffits and porch ceilings. Soffit panels on eaves shall be triple 4" center vented; all other soffit panels shall be triple 4" solid soffit material.

ALUMINUM CLADDING

- 1. Install .019" aluminum coil stock over the following items including but not limited to, all exterior door and window casings, rakes, fascias, returns, trims, posts, and headers.
- 2. Coil stock shall be formed and fashioned to follow existing design and contour of material being covered.
- 3. Where any piece of coil stock is wider than 8" create a false bend to minimize cupping.

CLEANING

- 1. The contractor shall clean up the job site on a daily basis. All nails, screws, metal and vinyl scraps shall be raked, or swept from sidewalks and grass areas.
- 2. Upon completion of work the Contractor shall wipe clean the siding material of all finger prints smudges or other markings.

Cost:	\$

CARPENTRY

GENERAL: This specification includes all labor, materials, taxes and permits required to

perform the carpentry work described below. All work must conform to applicable building codes. Coordinate with the work of other trades specified elsewhere.

BASEMENT

1. Provide and install new Brosco B75 handrail on one side of the basement stairs. New rail shall be fastened to framing members using brass plated handrail brackets. Railing to be between 34-38" measured from the stair nosing, continuous, and returned at the top and bottom

Cost: \$	
----------	--

ELECTRICAL

GENERAL

- 1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all material, labor, equipment, permits, taxes and fees necessary, as required to perform and complete the work specified herein and or as required by job conditions.
- 2. All materials shall be UL listed. All new fixtures shall be Energy Star rated.
- 3. Any cutting and patching necessary to complete the work described below will be the responsibility of the Contractor.
- 4. The use of surface mounted wire mold is prohibited unless specifically noted.

INTENT

The intent of the proposed work is to

- 1. Install wireless interconnected smoke detectors in each bedroom. Install wireless interconnected smoke & C.O detectors at each level of house.
- 2. Convert all outlets to GFI at kitchen backsplash.

SMOKE & C.O. DETECTORS

1. Provide and install First Alert brand (or equal) wireless, battery powered, interconnected, smoke detectors in each bedroom. Provide and install First Alert brand (or equal) wireless, battery powered, interconnected, smoke/CO detectors on each level of house.

GFCI OUTLETS

1. Convert all existing outlets to GFCI at kitchen back.

Cost:	\$

OIL FIRED HOT AIR HEATING SYSTEM

General

- 1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all materials, labor, equipment, permits, taxes and services necessary, to perform and complete the work specified herein and or as required by job conditions.
- 2. Furnace shall be installed in accordance with applicable National, State and Local plumbing codes. If codes and regulations differ from the manufactures installation instructions the Contractor shall consult the authority having jurisdiction prior to installation.
- 3. In all installations references should be made to the following standards:
 - ANSI/NFPA 31 Installation of Oil Burning Equipment, for installation requirements.
 - ANSI/NFPA 211- Chimneys, Fireplaces, Vents and Solid Fuel Burning Appliances for venting requirements.
 - ASME CSD -1 Control and Safety Devices for Automatically Fired Boilers, for assembly and operation of controls and safety devices.

All wiring shall be performed in accordance with the National Electrical Code.

INTENT

The intent of the proposed work shall include but not limited to the following:

- 1. Remove and dispose of existing furnace and components that are not compatible with the new furnace.
- 2. Install new Energy Star rated oil fired furnace. Re-connect existing air conditioning to new furnace (if applicable).
- 3. Replace whistler alarm in oil tank.
- 4. Install new flex duct supplies.

OIL FIRED HOT AIR FURNACE INSTALLATION

- 1. Remove and dispose of the existing furnace. Contractor shall salvage for reinstallation condensing lines and controls for air conditioner.
- 2. Remove and dispose of any non-adaptable furnace-related item(s) which would interfere with the installation of new furnace or impede the efficient operation of new furnace.
- 3. Install new oil-fired hot air furnace such as Rheem Classic Series, Term Pride or Carrier or approved equal. Re-install condensing lines and air conditioning controls (if applicable).
- 4. Furnace shall be Energy Star rated with a minimum AFUE rating of 85%.
- 5. Furnace shall be installed with all required/necessary controls, filters, valves, switches, wiring, ductwork, etc., for complete installation.
- 6. New furnace is to be sized to maintain a 70 degree temperature inside during a 0 degree temperature outside.
- 7. Adapt existing duct work from plenum as required to connect to existing duct work
- 8. Furnace is to be installed in accordance with manufacturer's instructions and all local and state regulations.
- 9. Locate and orient the furnace so as to facilitate maintenance, cleaning, adjustment, etc.
- 10. Install furnace on 4" solid cement blocks.
- 11. Test-fire new furnace and review operation in the presence of the owner.
- 12. Examine flue and advise owner of any necessary repairs, cleaning, etc.
- 13. Replace existing thermostat(s) with non-programmable digital thermostat(s) with battery backup. Such as Honeywell or approved equal.
- 14. Install duct wrap on all supplies and accessible returns within basement area. Insulation shall be installed so as to achieve an R-6 rating upon completion.

Cost:	\$ 	

PAINTING

GENERAL:

This specification includes all labor, material, insurance, taxes, permits and fees required to perform the work described below. Coordinate with the work of other trades specified elsewhere. The Contractor shall adhere strictly to the provisions of the ALead-Based Paint Poisoning Prevention Act. Specifically, the Contractor will not utilize lead-based paint as a finish or undercoat or any other use in or out of residential dwellings and shall comply with all provisions of Public Law 91-695 (42 U.S.C. 4831) ALead Based Paint Poisoning Act.

INTENT

The intent of the proposed work is to:

- 1. Address all lead hazards listed in the enclosed lead report.
- 2. Paint all newly installed components (that require painting) listed in the enclosed specification unless listed otherwise.

GENERAL PAINTING REQUIREMENTS

- 1. All new materials to be painted shall be primed with materials as recommended by the manufacturer of the finish paint.
- 2. On all surfaces to be painted, any necessary sanding, scraping, cleaning, priming, puttying or other surface preparation is required.
- 3. All painting must be performed in accordance with manufacturer's instructions. All painting is to be performed in two (2) coats.
- 4. Contractor shall use Benjamin Moore, California Paint or Sherwin Williams paint or approved equal.
- 5. Colors to be selected by Owner from manufacturer's standard color chart. Paint sheen (gloss, semi-gloss, eggshell, flat, etc.) to be owner's choice.
- 6. All items not requiring painting are to be completely protected from over-spray, drips, or any other damage during the course of this work.
- 7. Upon completion, all work must be free from runs, drips, sags, variations in color or gloss or any other defect.

Cost:	\$ _			
	_			

COST SUMMARY

ROOFING	\$
GUTTERS	\$
WINDOWS	\$
DOORS	\$
SIDING	\$
CARPENTRY	\$
ELECTRICAL	\$
HEATING	\$
PAINTING (INCLUDING LEAD PAINT HAZARD REDUCTION)	\$
TOTAL	\$

		•	
•			
*			
	4		

PROPERTY OWNER VERIFICATION

I, the undersigned Owner(s) acknowledge that I have fully read and understand the attached project specifications. I understand this to be the scope of work and the extent of the renovations to be performed at the property location shown below.

121 Nothside Drive Torrington CT 06790 Project #: 143-341

I understand that any revisions to these specifications changing the scope of work can be made only
for unforeseen circumstances. This is for my protection and for providing a clear understanding to
the contractor who will provide a quote for the proposed work.
DATE: 10/21/14 OWNER: Stanley Relia
Stanley Relva

Small, Minority, Women-Owned Business Concern Representation

The bidder represents and	dicertifies as part of its bid	√ offer, that it –	
concern, including its af	filiates, that is independe	ently owned and	acern," as used in this provision, means a doperated, not dominant in the field of under the criteria and size standards in 13
(b) Is, Is not a wom means a business that is a control and operate the bu	t least 51 percent owned by	men-owned busi y a woman or w	iness enterprise," as used in this provision, omen who are U.S. citizens and who also
means a business which is in the case of a publicly	at least 51 percent owned owned business, at least : and whose management :	or controlled by 51 percent of its and daily operat	ess enterprise," as used in this provision, one or more minority group members or, s voting stock is owned by one or more tions are controlled by one or more such others are:
(Check the block applicat	ole to you)		
☐ Black Americans ☐ Asian Indian America		ic Americans ericans	Hispanic Americans Hasidic Jewish Americans
******	*******	*****	*********
	fees, necessary to comp	plete the work side Drive on CT 06790	material, permits, taxes, insurance, as specified above for the property
All work will be perform	ned in accordance to ap	plicable Build	ing and Fire Code(s).
Company Name:			
Address:			
	· .		
Phone: FEIN or	Fax:	Email	l:Exp.
	Contractor Lice	ense #	
Date:			
Total Bid Amount: \$			

(This information must be submitted in order to have your bid considered responsive)