


BENCHMARK  
SPRINKLE IN POLE #3  
ELEV. 90.00

BENCHMARK TOP  
OF HYDRA-MAN METER  
ELEV. 94.15

**EROSION AND SEDIMENTATION CONTROL**

- 1) All perimeter erosion and sedimentation controls must be installed prior to the commencement of earthwork.
- 2) Accessible reserves of hay bales and stakes are to be maintained on site for routine maintenance and in the event of unanticipated problems requiring emergency response.
- 3) Hay bales should be installed in accordance with the details provided.
- 4) No work is to occur on the wetland side of the perimeter erosion and sedimentation controls. All perimeter controls serve as the project limit of disturbance.
- 5) No stones, brush, construction debris, litter, or other materials are to be deposited on the wetland side of the erosion and sedimentation controls.
- 6) All disturbed soils not designated for other surface treatment are to be loamed and seeded immediately following final grading.
- 7) Appropriate precautions should be taken to prevent the transport of soil offsite from construction equipment.
- 8) All perimeter erosion and sedimentation controls must be properly maintained and must remain in place until the soils have been stabilized to the satisfaction of the Engineer and the Seekonk Conservation Commission.

LOCATION MAP  
0 1200  
SCALE IN FEET

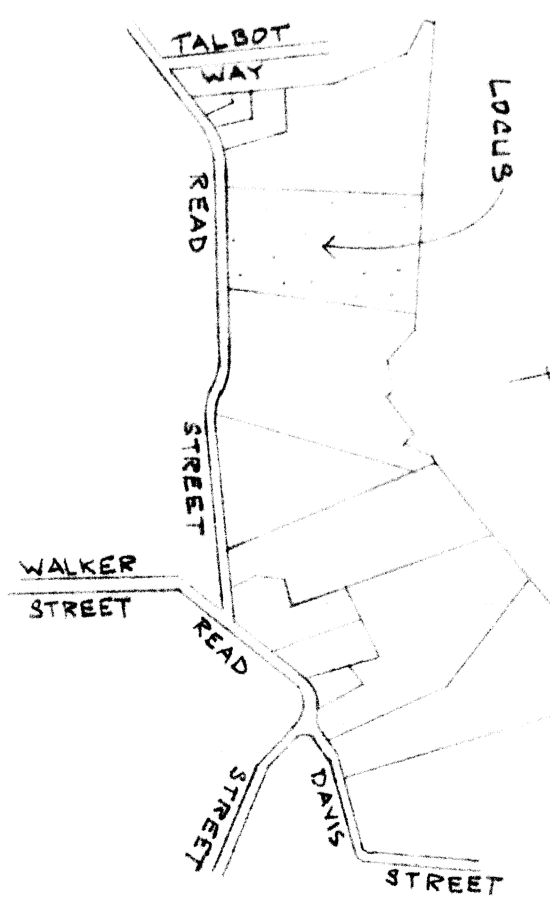

**PROFESSIONAL SEAL**  
  
 KEVIN and CYNTHIA BRUSSEAU  
 150 READ STREET  
 SEEKONK, MASSACHUSETTS  
 CAPUTO AND WICK LTD.  
 DATE 7/31/97

**SITE PLAN**